



NEW TRASDATA

PLUGIN 706 → DENSO SH7055 94661024 GM/ISUZU

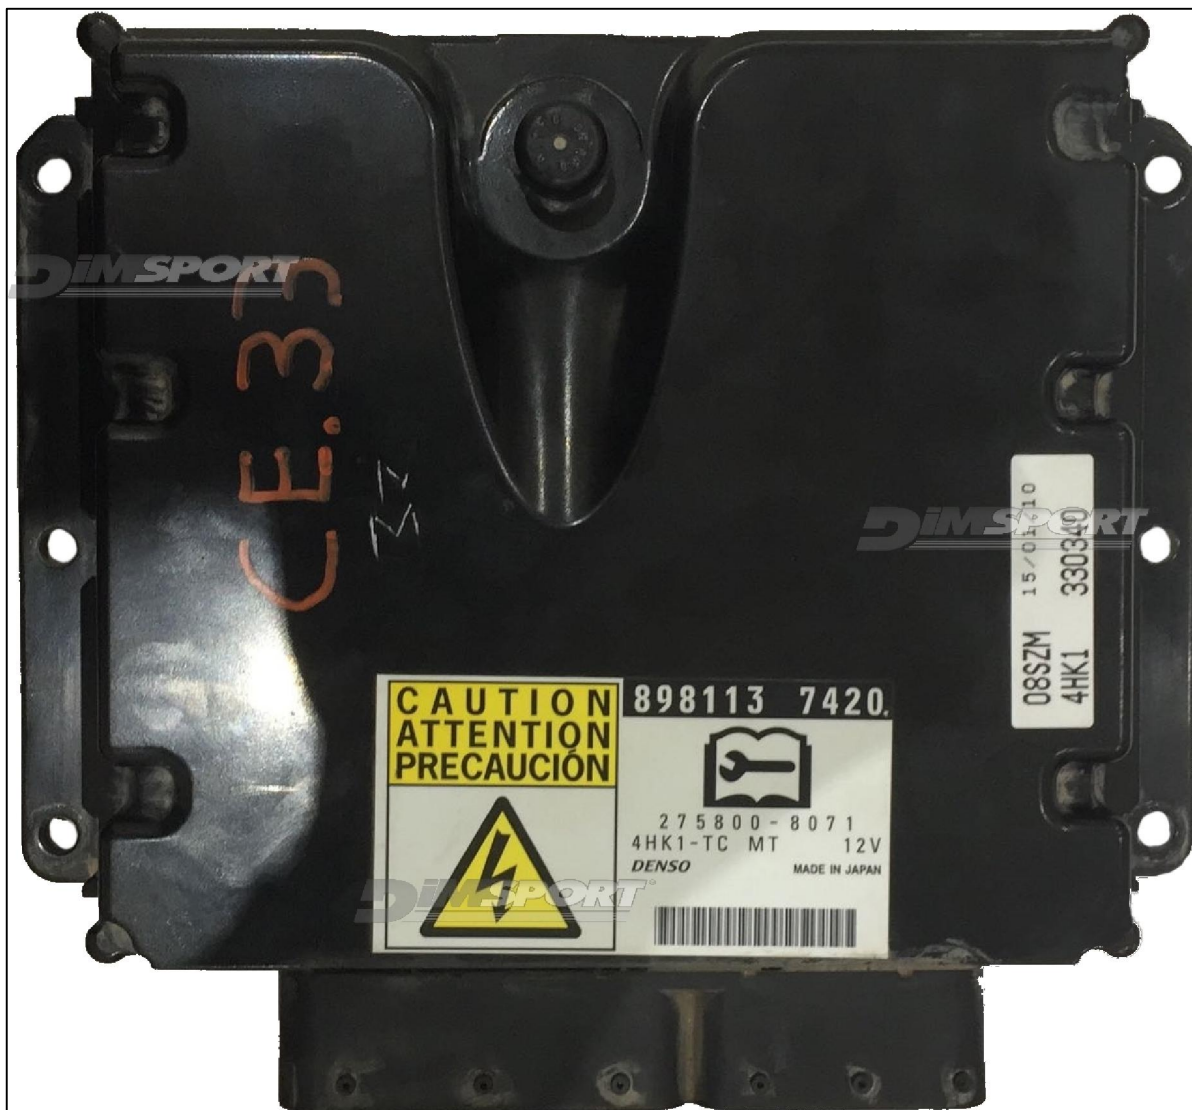


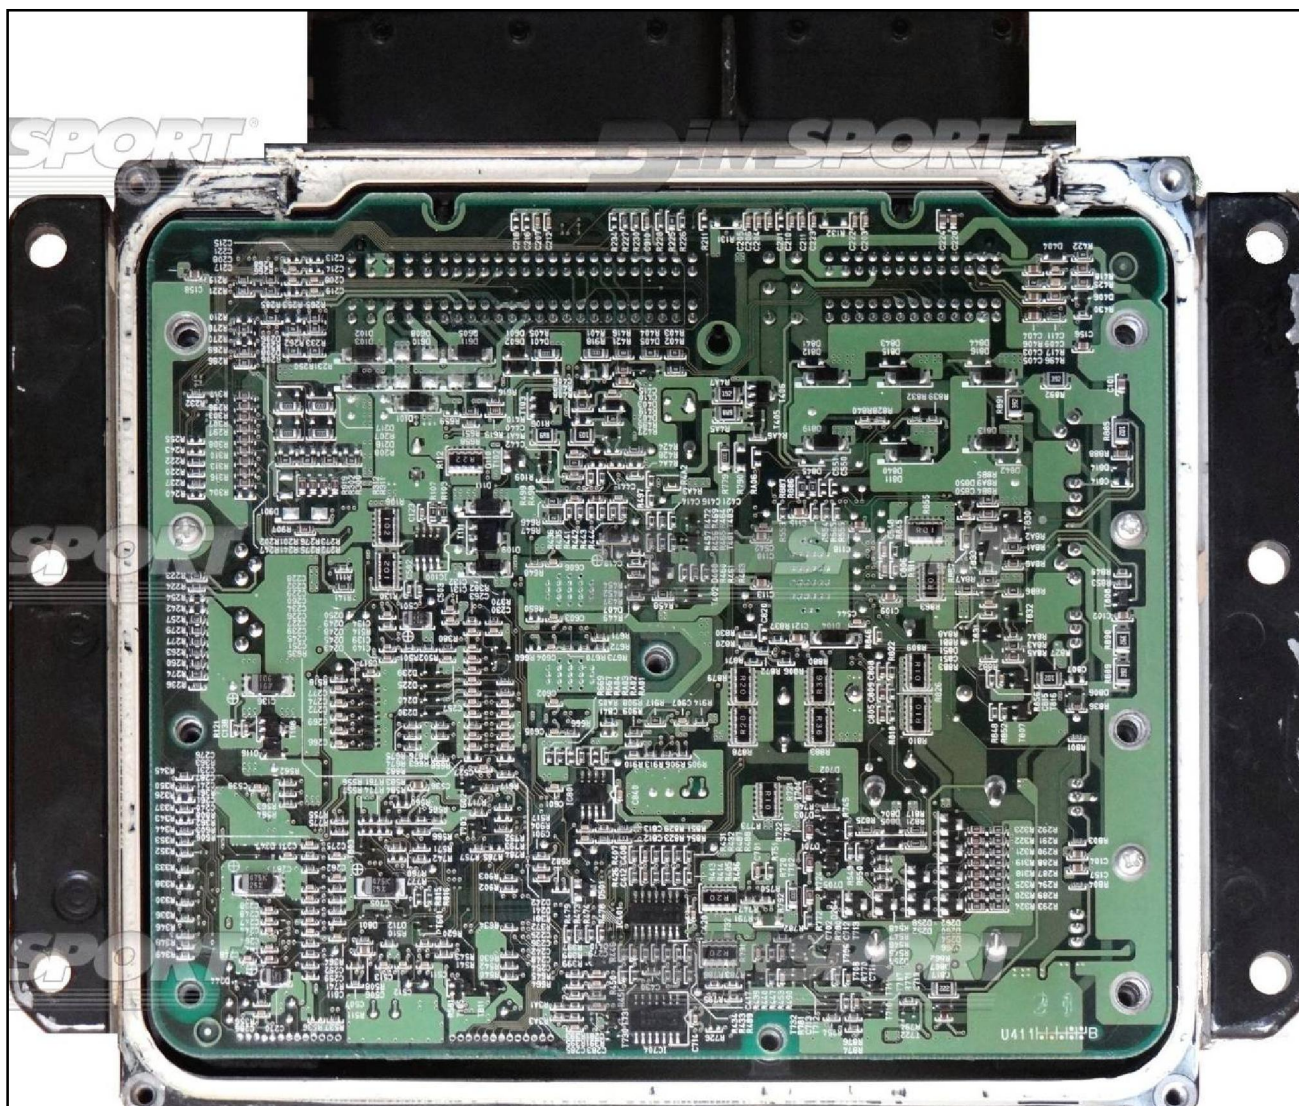


DIRECT CONNECTION

In order to connect to the ECU use the CABLE F32GN037C.

Make sure that the POWER led (red) on NEW TRASDATA is ON.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION
ROSSO RED	POSITIVO DIRETTO POWER BATTERY
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON
NERO BLACK	MASSA GND
GIALLO YELLOW	KLINE
VERDE GREEN	CAN LOW
BIANCO WHITE	CAN HIGH
GRIGIO GREY	POL4 BOOT
BLU BLUE	POL5 CNF1
VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE
MARRONE BROWN	RESET

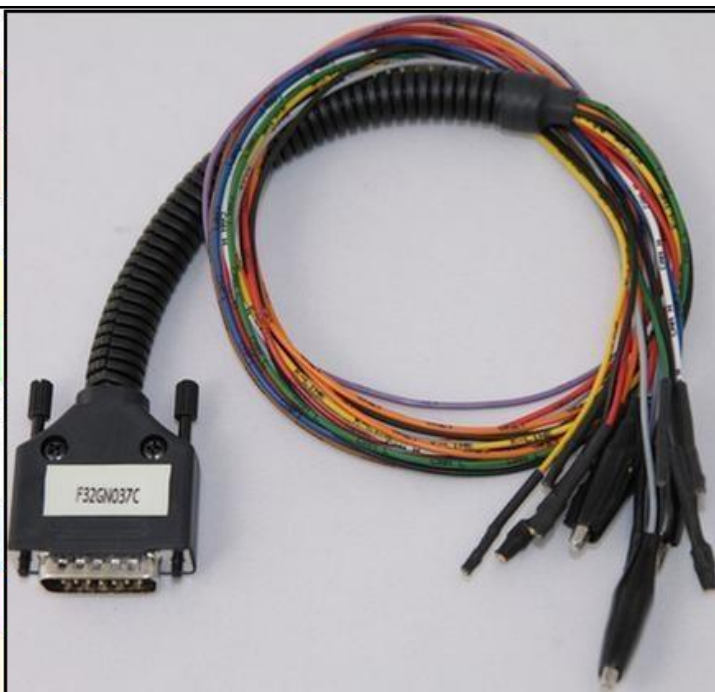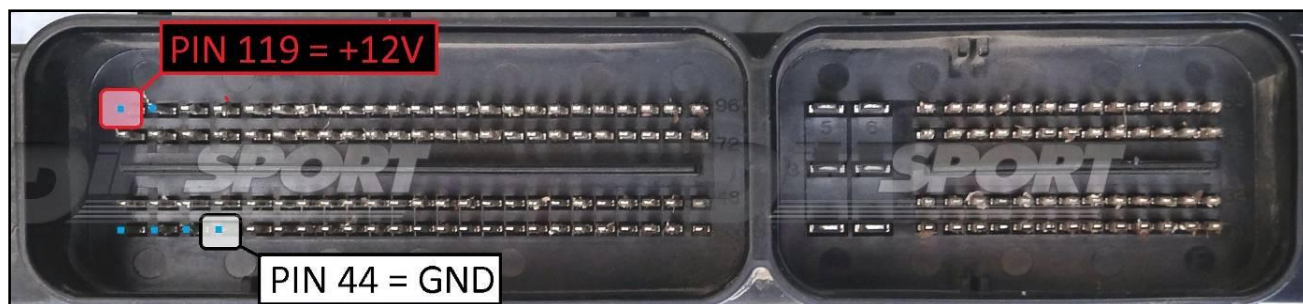**ECU CONNECTOR****WARNING :**

on this ECU you must use two different flat cables: one is for the READING procedure and one is for the WRITING procedure.

DIRECT CONNECTION – ECU READING:

For the READING procedure use the FLAT cable F34NTF53

A close-up photograph of a black 26-pin D-sub connector. The pins are numbered 1 through 26. Wires of various colors are plugged into the connector, including red, yellow, green, blue, white, black, and brown. The wires are bundled together and extend upwards from the connector.

A photograph of a long, flat, multi-colored ribbon cable. The cable is oriented vertically, with the 26-pin connector at the bottom. The cable is made of many thin, flat wires of various colors, including red, yellow, green, blue, white, black, and brown. The cable is bundled together and extends upwards from the connector.

Pin	Colore Colour
11	Non usato Not used
12	Non usato Not used
13	Non usato Not used
14	Non usato Not used
15	Non usato Not used
16	Non usato Not used
17	Non usato Not used
18	Grigio Grey
19	Bianco White
20	Nero Black
21	Marrone Brown
22	Rosso Red
23	Arancio Orange
24	Giallo Yellow
25	Verde Green
26	Non usato Not used

For a correct soldering procedure clean very well the soldering lay-by pins from the plastic film.
We suggest you to use fine grit glass-paper smoothing by gentle pressure
the connection lay by pins.



DIRECT CONNECTION – ECU WRITING:

For the WRITING procedure use the FLAT cable F34NTF51



Pin	Colore Colour
1	Marrone Brown
2	Non usato Not used
3	Non usato Not used
4	Non usato Not used
5	Verde Green
6	Blu Blue
7	Viola Violet
8	Grigio Grey
9	Non usato Not used
10	Nero Black






For a correct soldering procedure clean very well the soldering lay-by pins from the plastic film. We suggest you to use fine grit glass-paper smoothing by gentle pressure the connection lay by pins.



METAL POSITIONING FRAME CONNECTION – ECU READING

Power the ECU with the F32GN037C wiring. Use the adapter DIMA F34DM016.

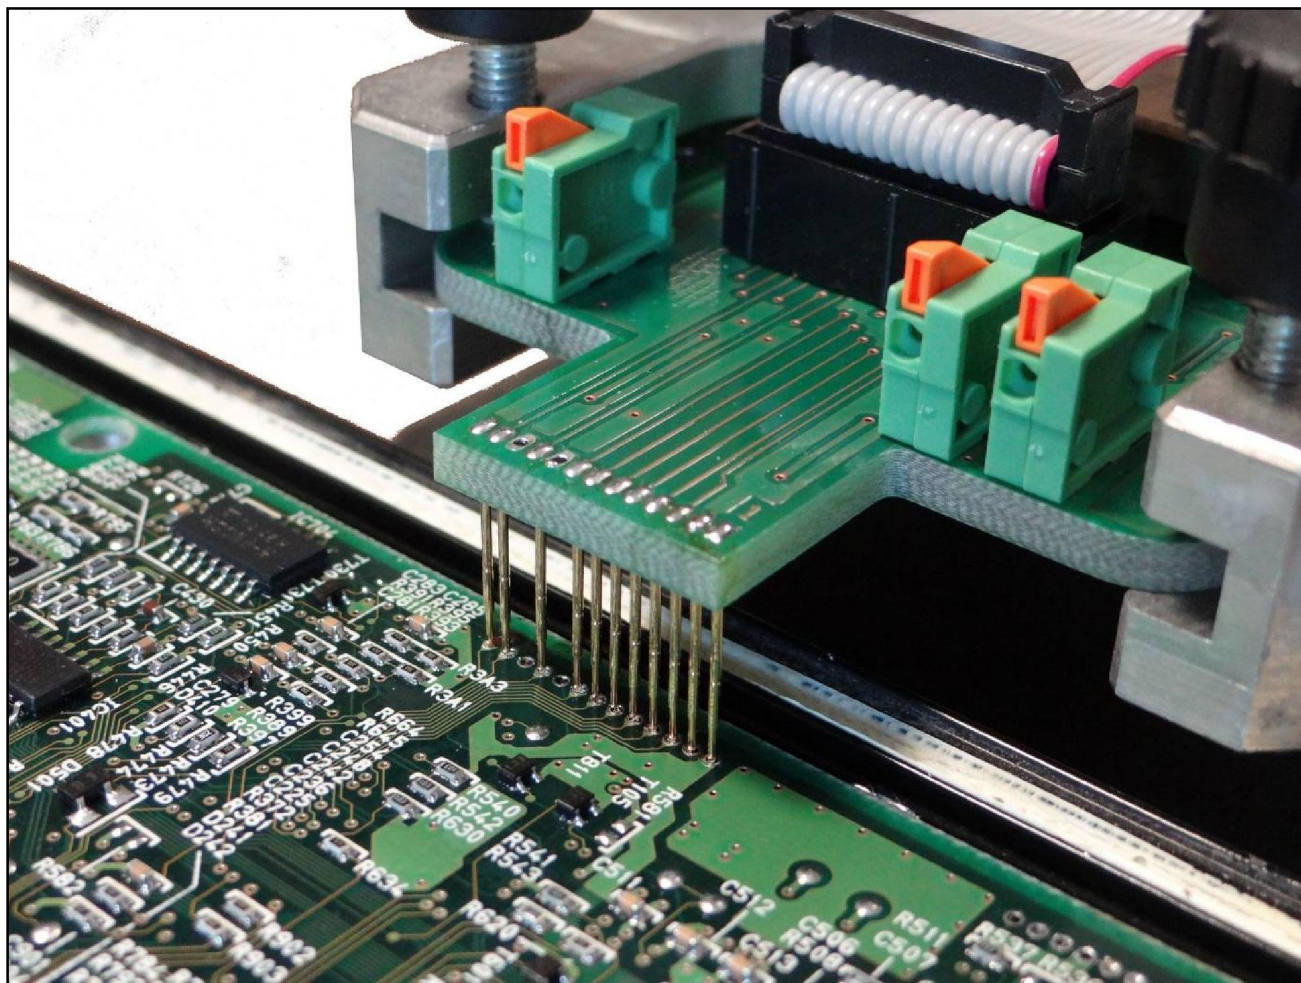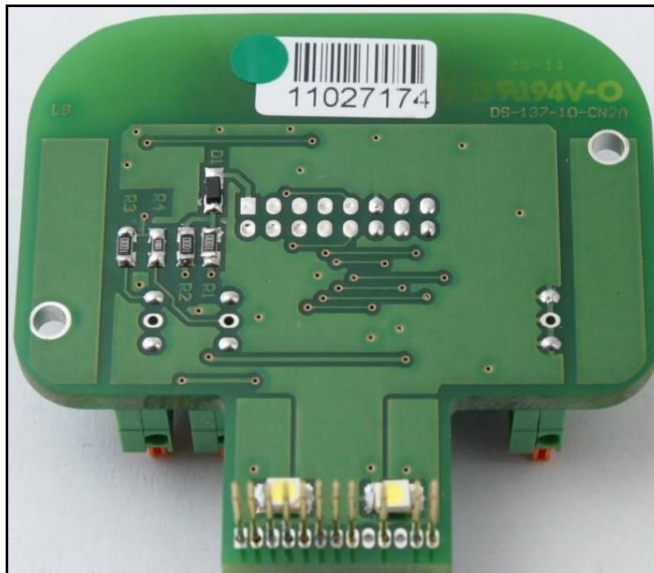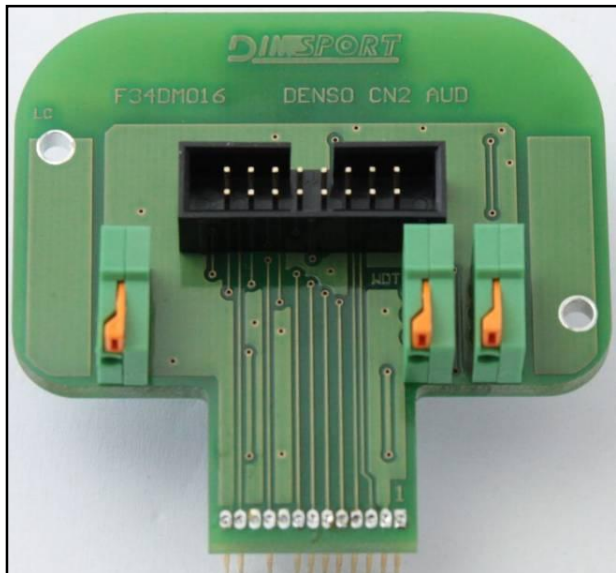

METAL POSITIONING FRAME CONNECTION – ECU WRITING

Power the ECU with the F32GN037C wiring. Use the adapter DIMA F34DM019.

