



PLUGIN 680 :NEW TRASDATA

MEC37-900
NISSAN
F 7

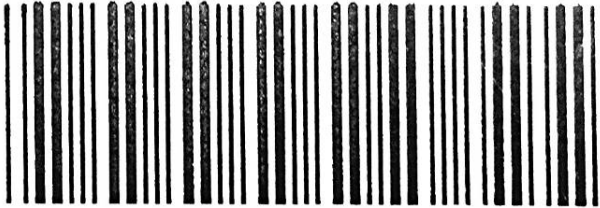

MEC37-900 B1 1126
Hitachi Automotive Systems
Europe Ltd (UK)

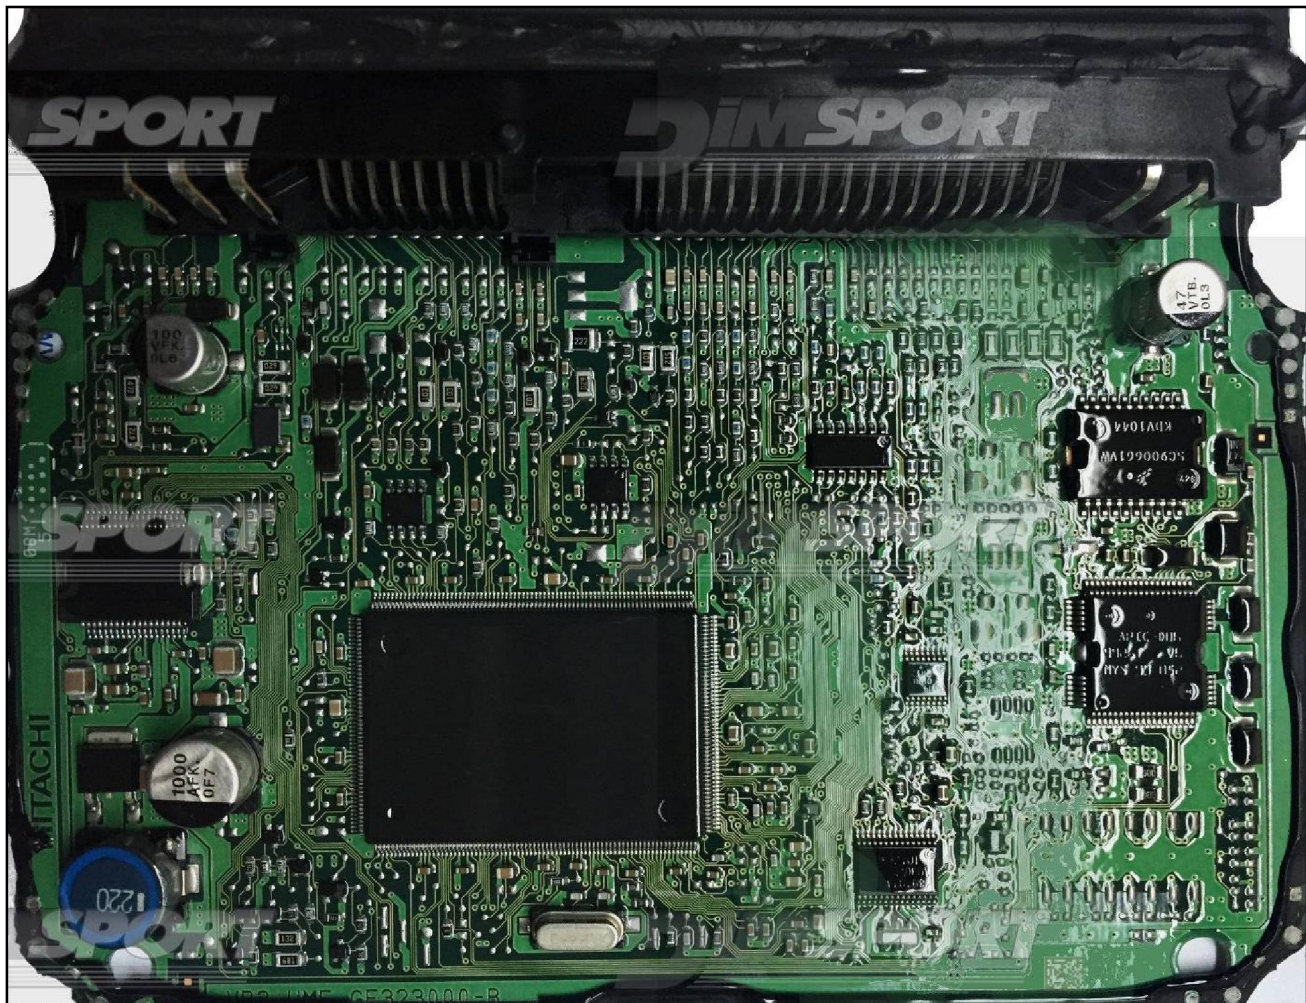


DIRECT CONNECTION

For the connection with LOOSE WIRES use the cable F32GN037C connected to the ECU.

Do NOT use this connection for the DIMA.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION
ROSSO RED	POSITIVO DIRETTO POWER BATTERY
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON
NERO BLACK	MASSA GND
GIALLO YELLOW	KLINE
VERDE GREEN	CAN LOW
BIANCO WHITE	CAN HIGH
GRIGIO GREY	POL4 BOOT
BLU BLUE	POL5 CNF1
VIOLO/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE
MARRONE BROWN	RESET

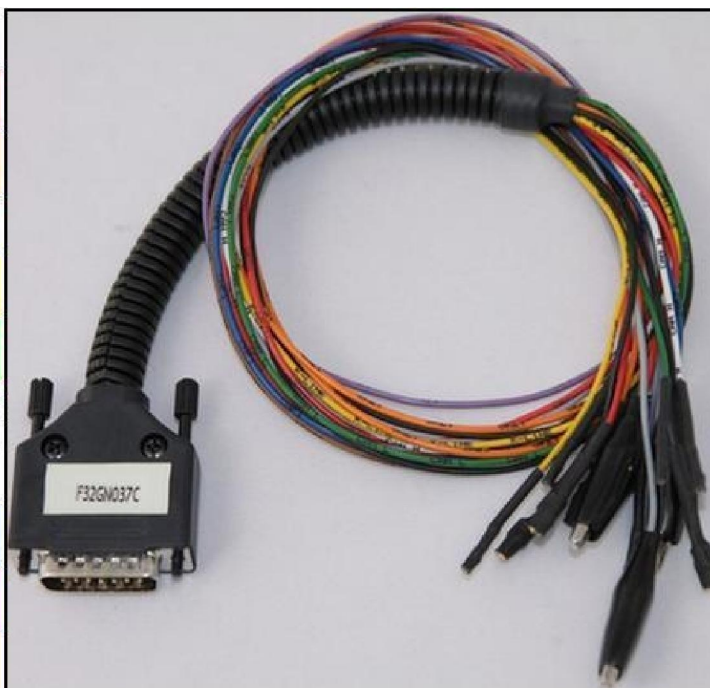

ECU CONNECTOR




DIRECT CONNECTION – ECU READING:


For the READING procedure use the FLAT cable F34NTF53, you have to connect the wiring on both sides of the ECU.

			
Pin	Colore Colour		
11	Non usato Not used		
12	Non usato Not used		
13	Non usato Not used		
14	Non usato Not used		
15	Non usato Not used		
16	Blu Blue		
17	Viola Violet		
18	Grigio Grey		
19	Bianco White		
20	Nero Black		
21	Marrone Brown		
22	Rosso Red		
23	Arancio Orange		
24	Giallo Yellow		
25	Verde Green		
26	Non usato Not used		

Microprocessor side


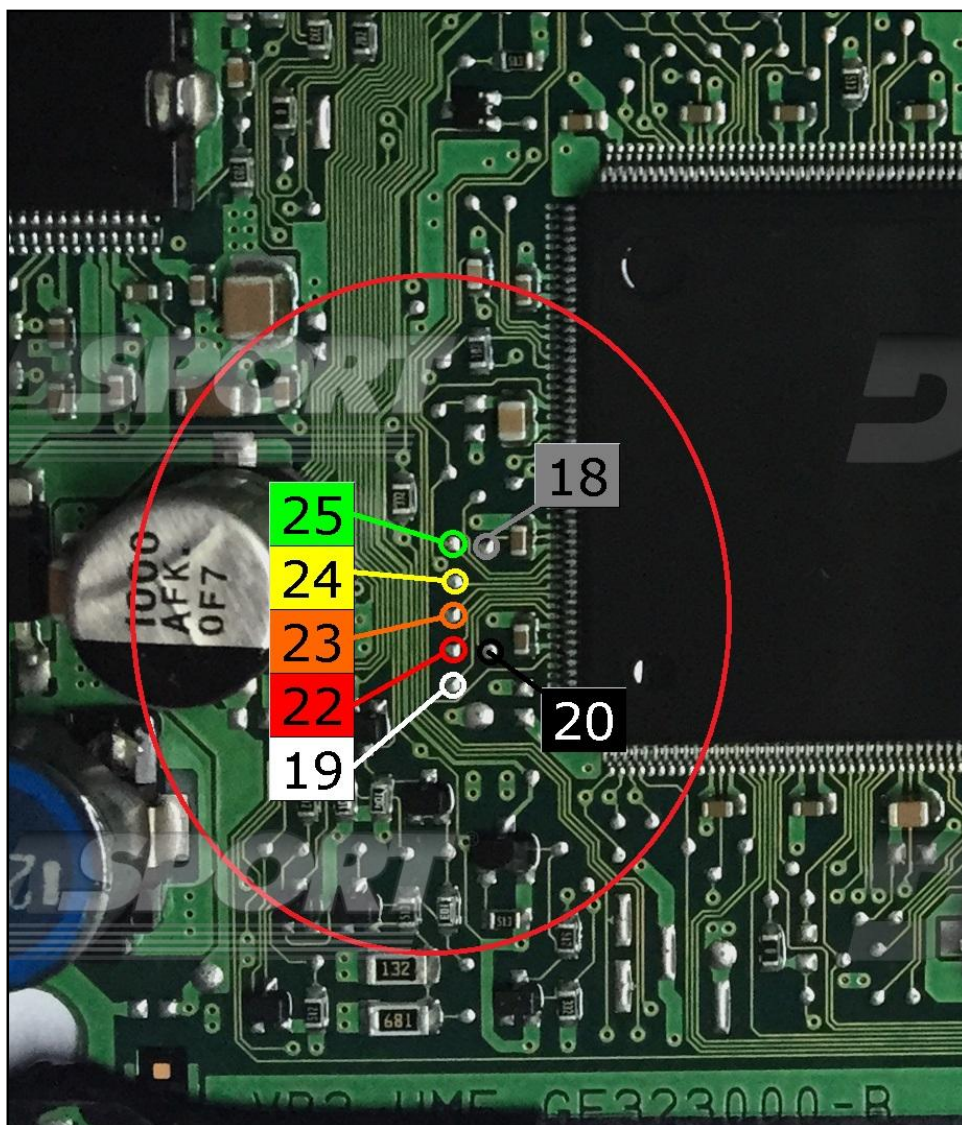


Opposite side

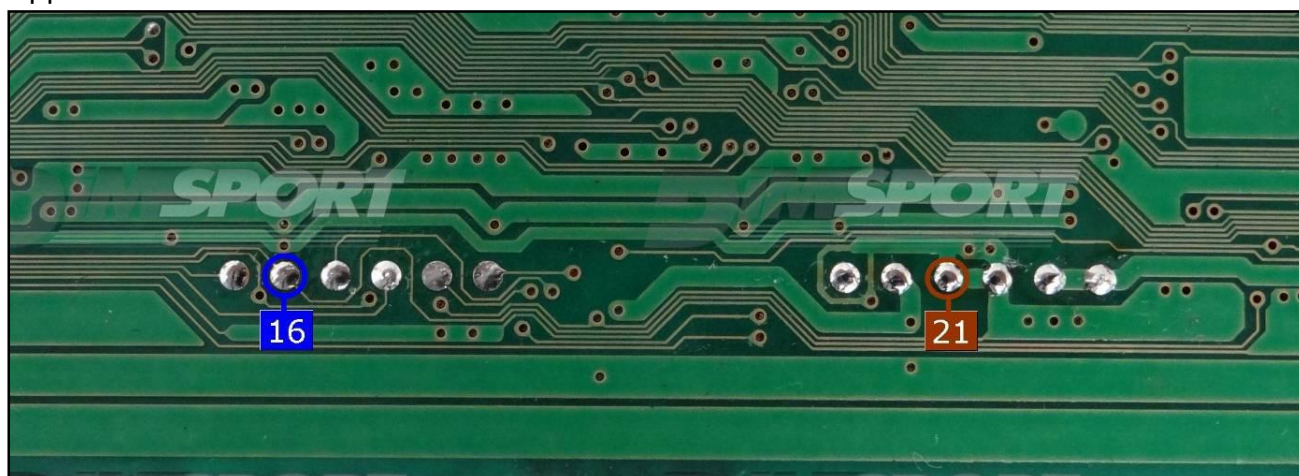

DIRECT CONNECTION – ECU WRITING:

For the WRITING procedure use the FLAT cable F34NTF51

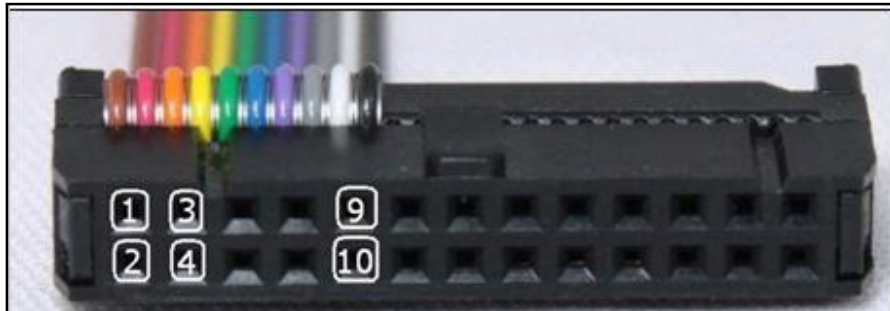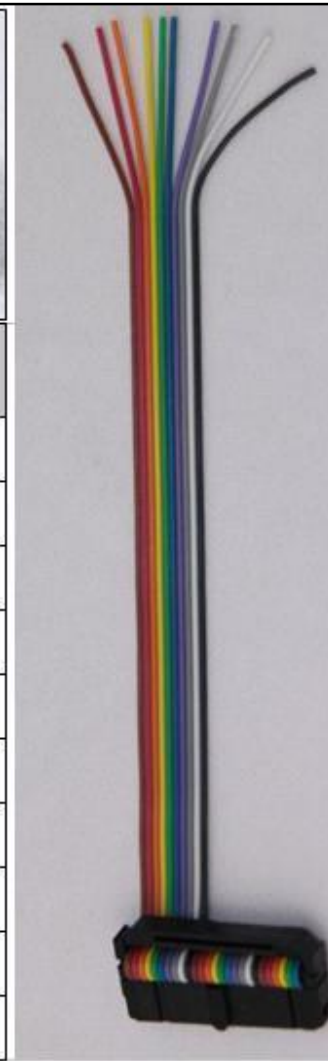Pin	Colore Colour
1	Marrone Brown
2	Non usato Not used
3	Non usato Not used
4	Giallo Yellow
5	Verde Green
6	Blu Blue
7	Viola Violet
8	Grigio Grey
9	Bianco White
10	Nero Black

