
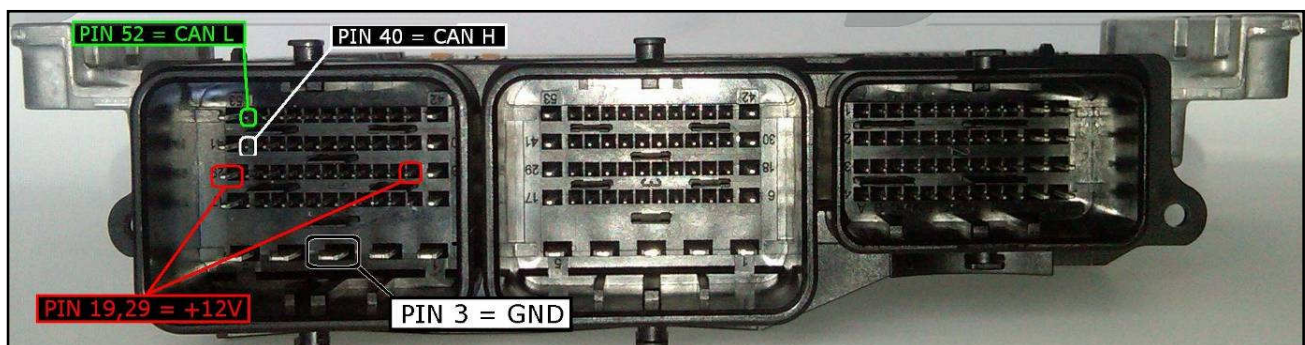



NEW TRASDATA = PLUGIN 208,516

DIRECT CONNECTION

In order to connect to the ECU use the CABLE F32GN037C.
Make sure that the POWER led (red) on NEW TRASDATA is ON.
Do not use this connection with the DIMA.



COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION
ROSSO RED	POSITIVO DIRETTO POWER BATTERY
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON
NERO BLACK	MASSA GND
GIALLO YELLOW	KLINE
VERDE GREEN	CAN LOW
BIANCO WHITE	CAN HIGH
GRIGIO GREY	POL4 BOOT
BLU BLUE	POL5 CNF1
VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE
MARRONE GREY	RESET

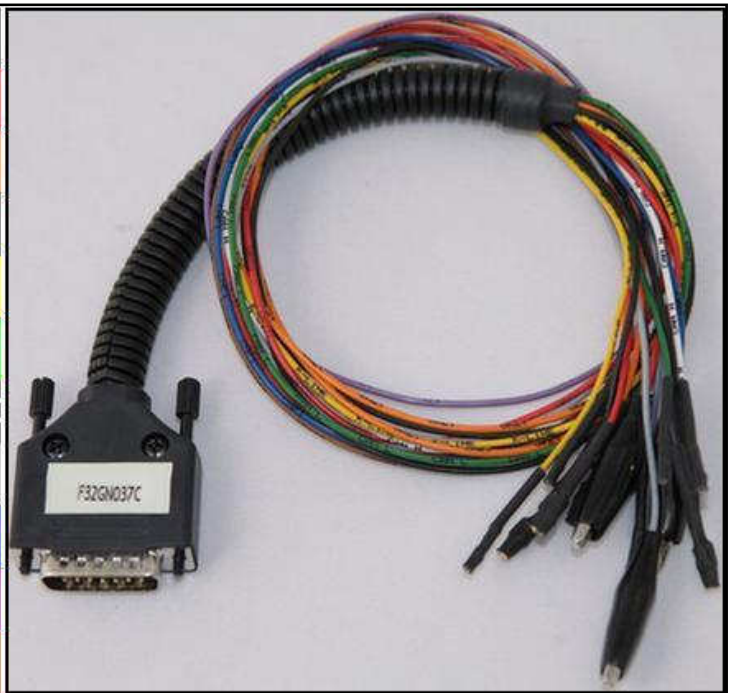


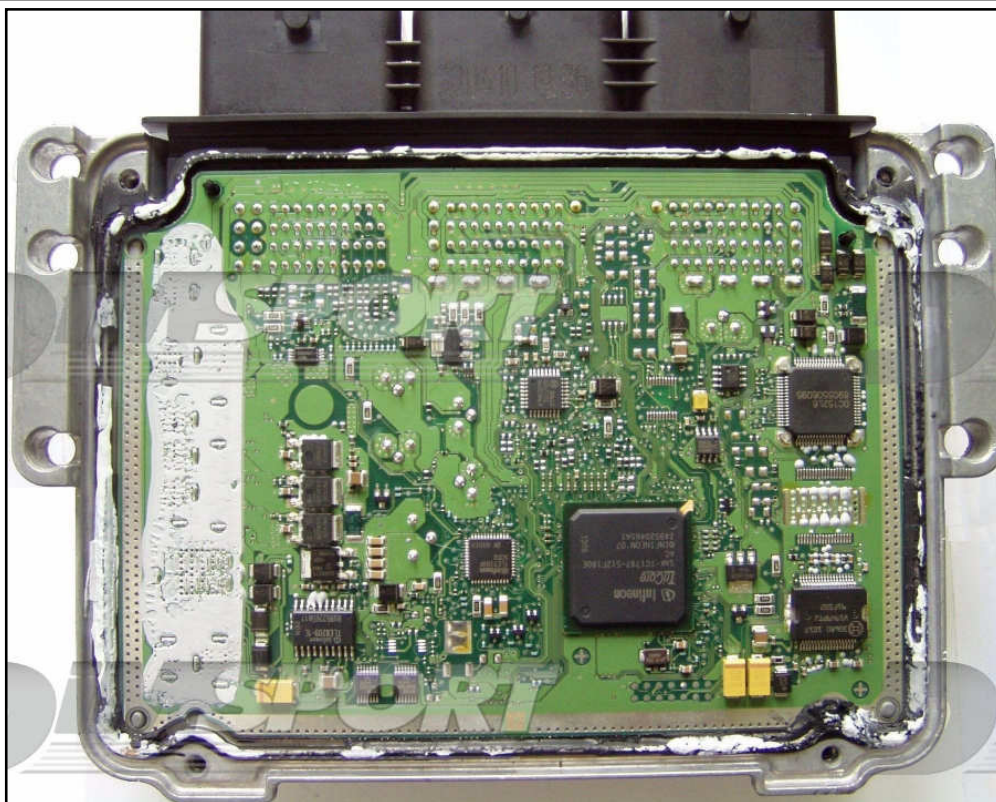TYPE 01**DIRECT CONNECTION**

DIMA CONNECTION


Connect the BOOT pin to the N 10 PAD of the lay-by pins.

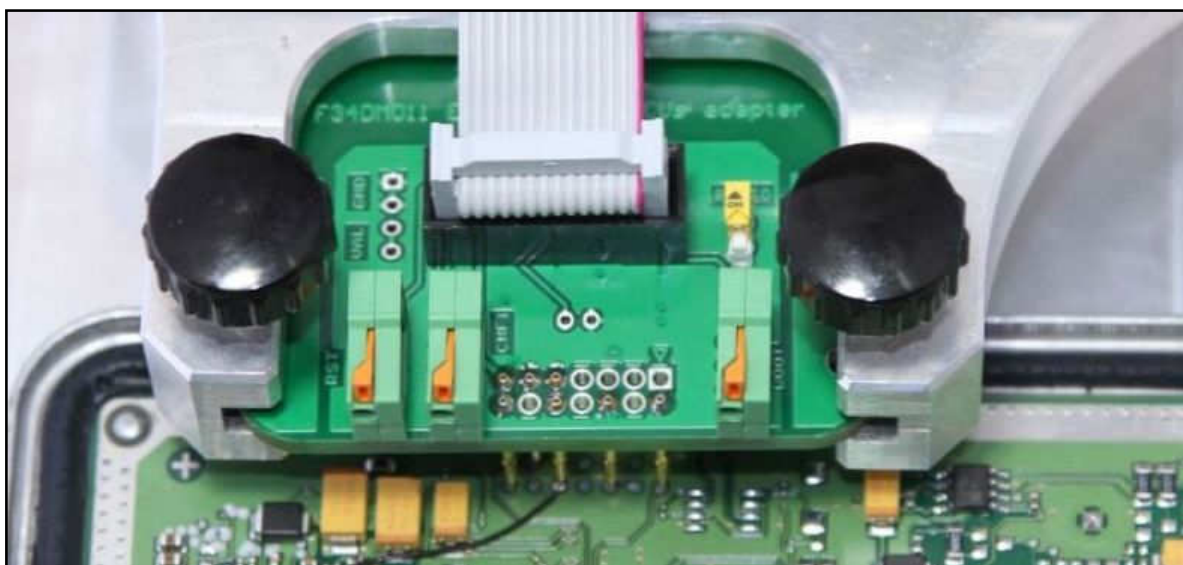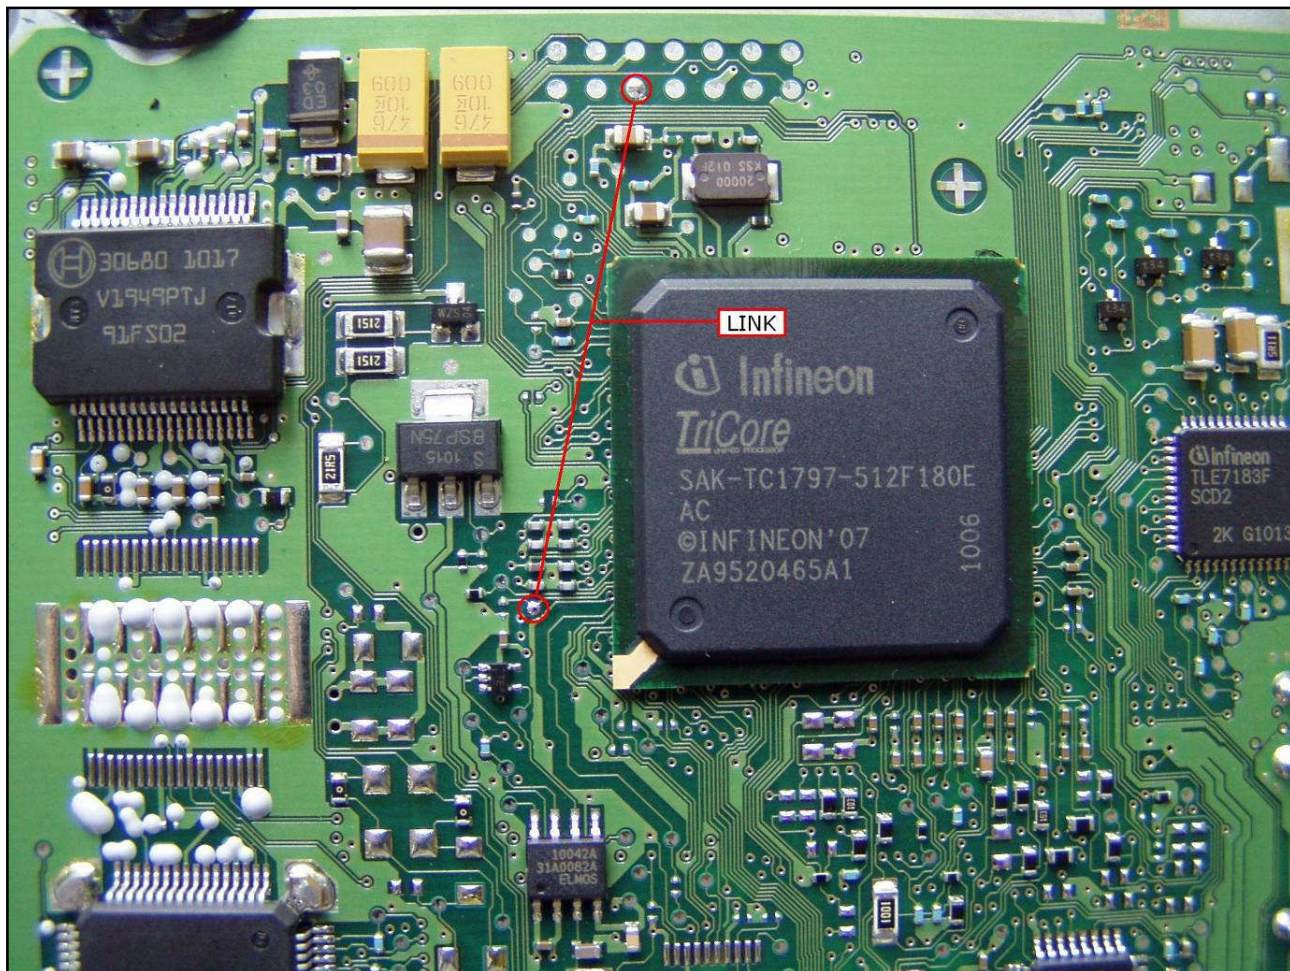

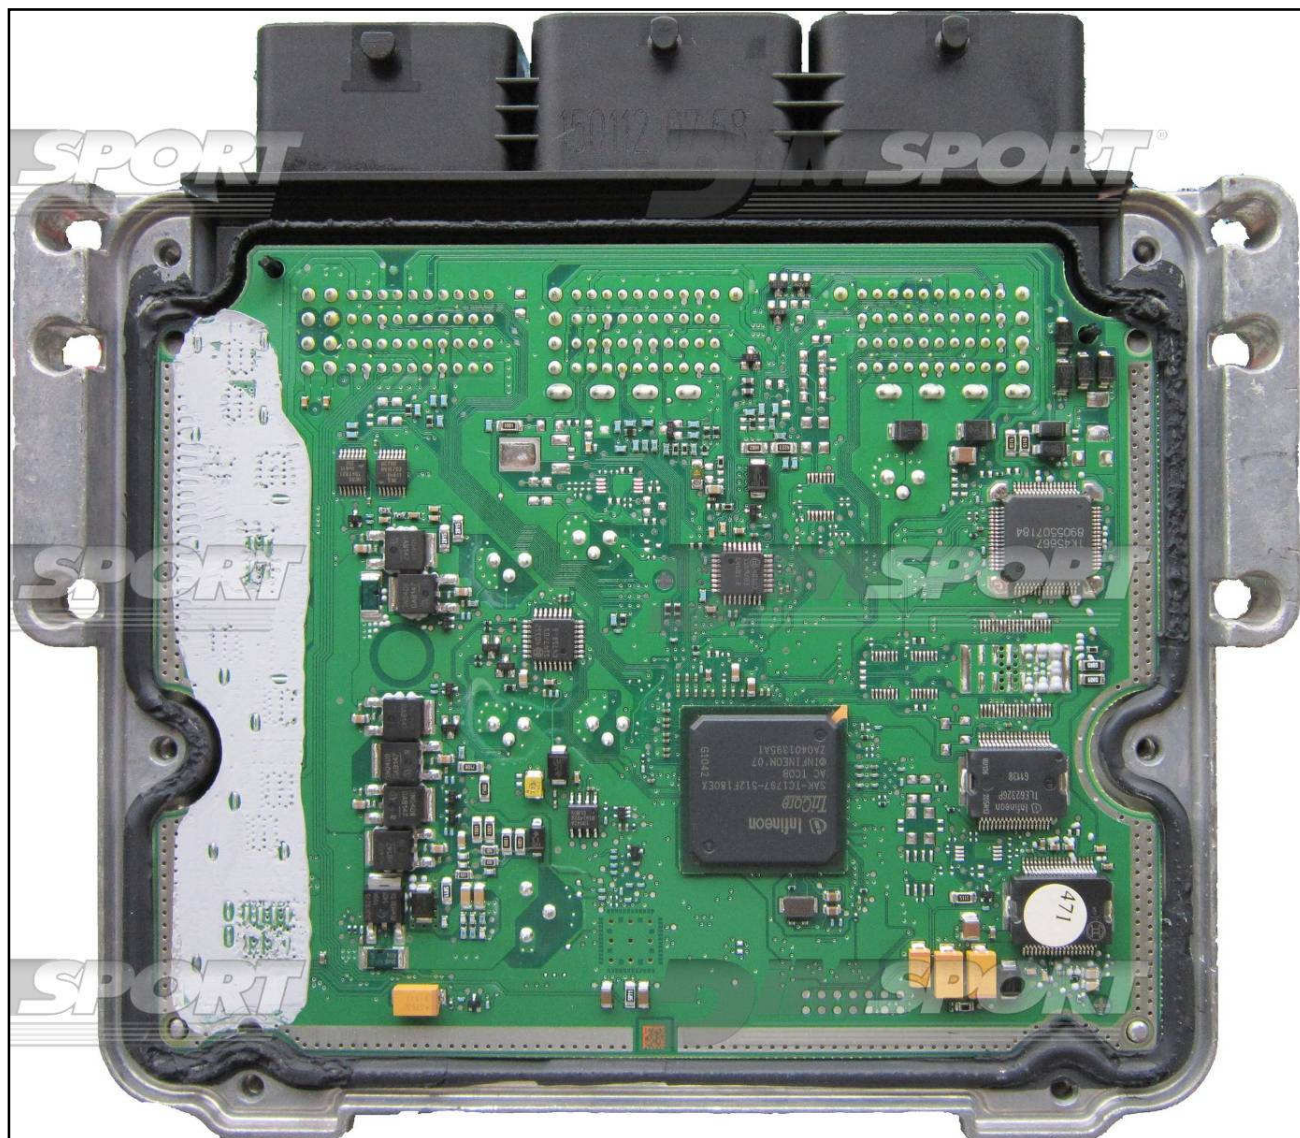TIPO 02

DIRECT CONNECTION

WARNING: the boot pin is placed under one side of the micro, be careful while soldering to avoid any damage to the microprocessor.

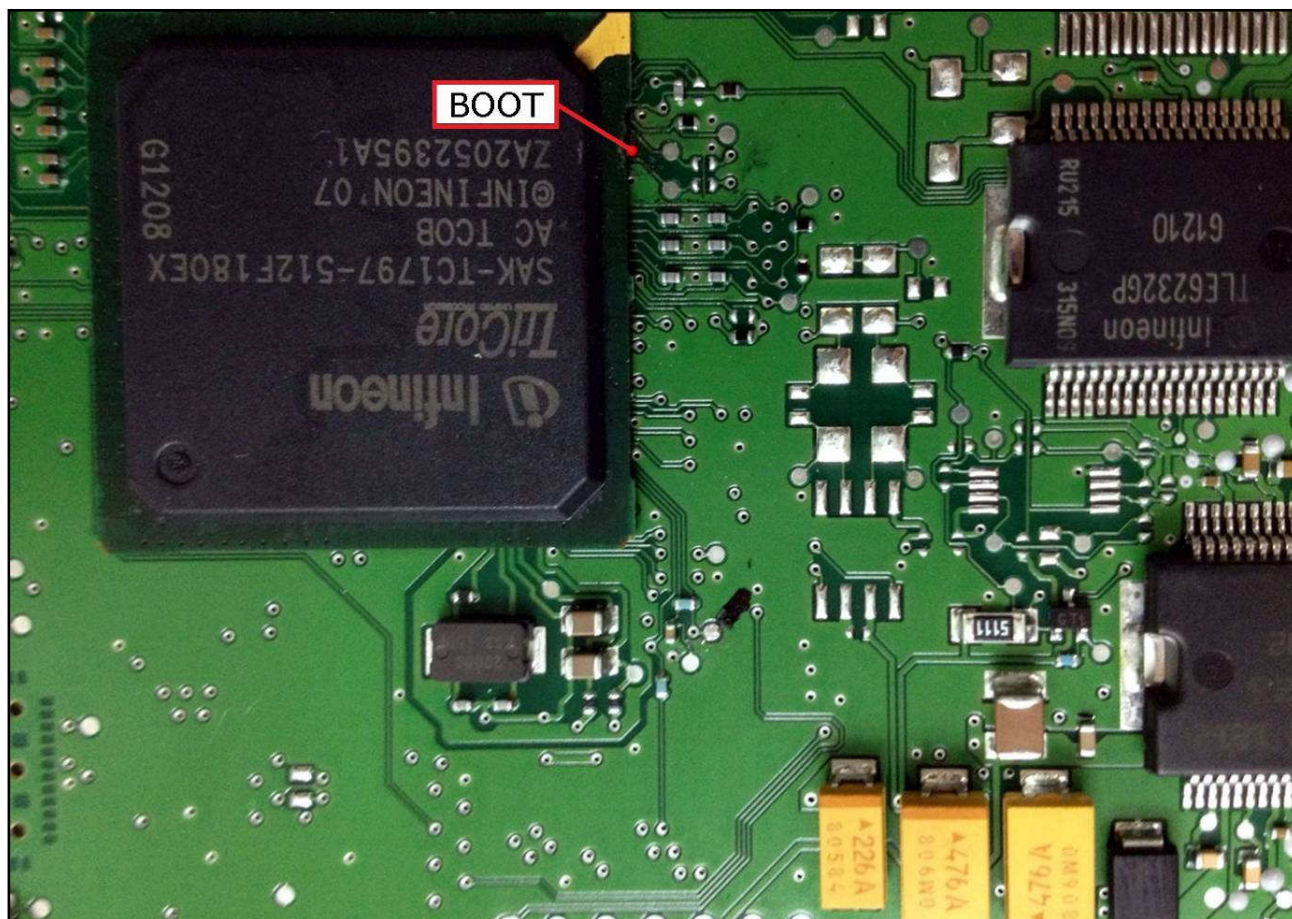

DIMA CONNECTION

Connect the BOOT pin to the N 10 PAD of the lay-by pins.

