


PLUGIN 650 :NEW TRASDATA

MEC37-580


NISSAN


J M



MEC37-580 A1 8922

Hitachi Automotive Systems
Europe Ltd (UK)

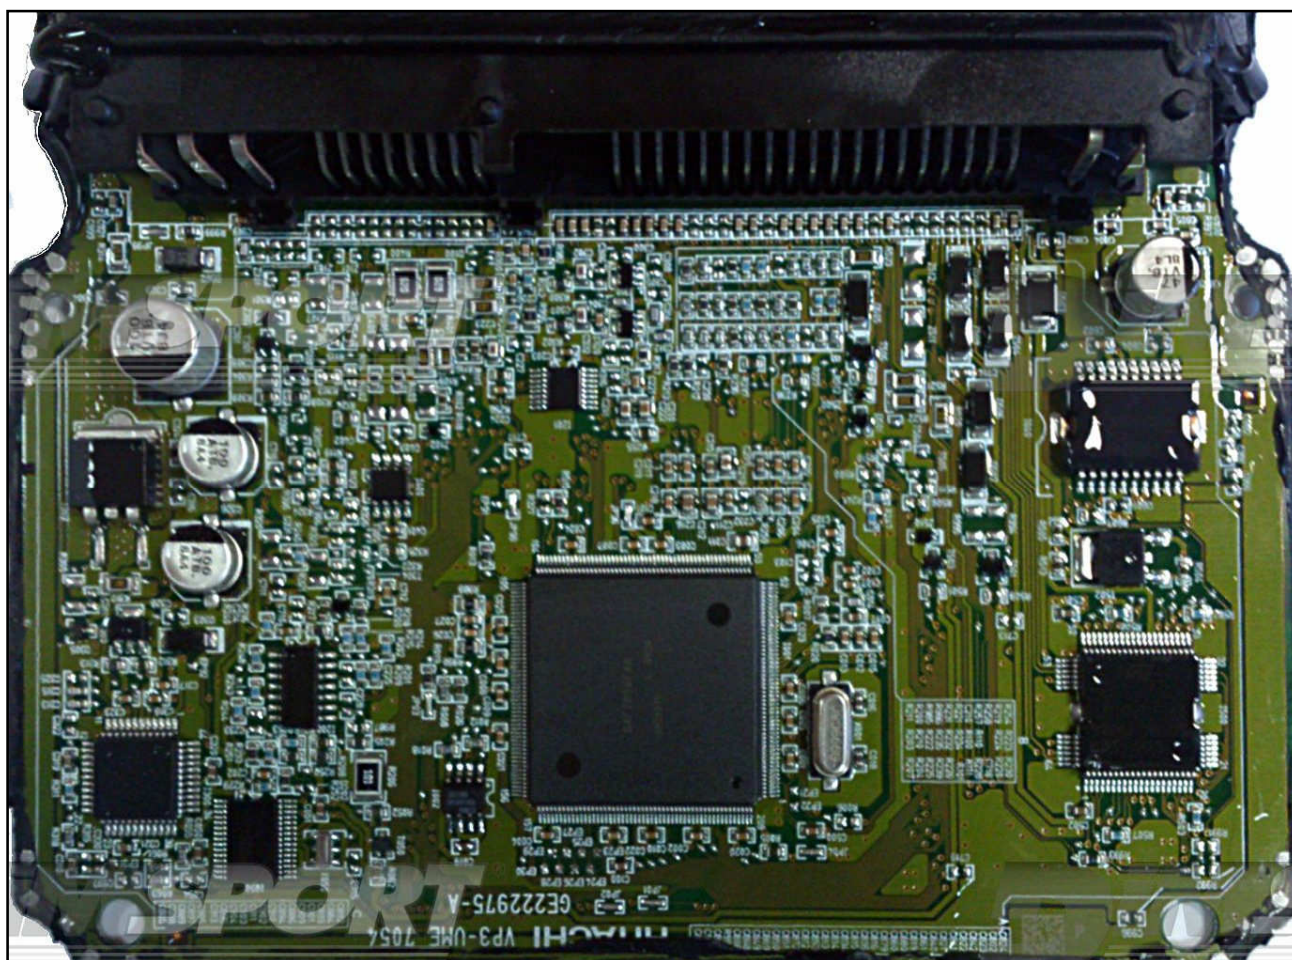

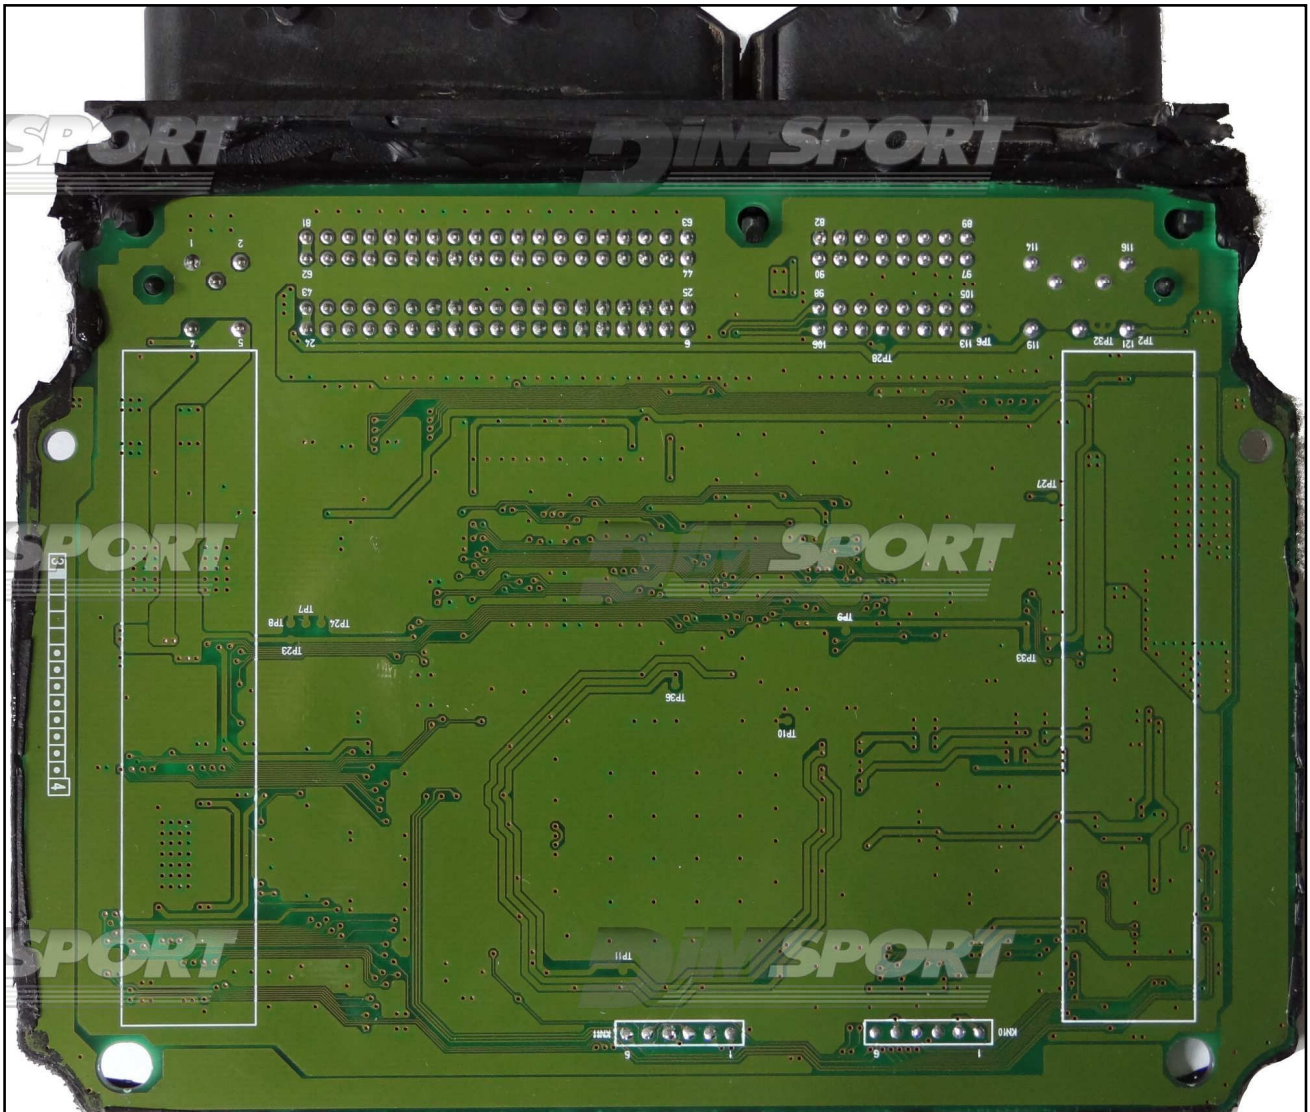


DIRECT CONNECTION

In order to connect to the ECU use the CABLE F32GN037C.

Make sure that the POWER led (red) on NEW TRASDATA is ON.

COLORE FILO WIRE COLOUR		DESCRIZIONE DESCRIPTION
ROSSO RED		POSITIVO DIRETTO POWER BATTERY
ARANCIO ORANGE		POSITIVO SOTTO QUADRO POWER SWITCH ON
NERO BLACK		MASSA GND
GIALLO YELLOW		KLINE
VERDE GREEN		CAN LOW
BIANCO WHITE		CAN HIGH
GRIGIO GREY		POL4 BOOT
BLU BLUE		POL5 CNF1
VIOLA/GRIGIO PURPLE/GREY		TENSIONE PROG. PROG. VOLTAGE
MARRONE BROWN		RESET


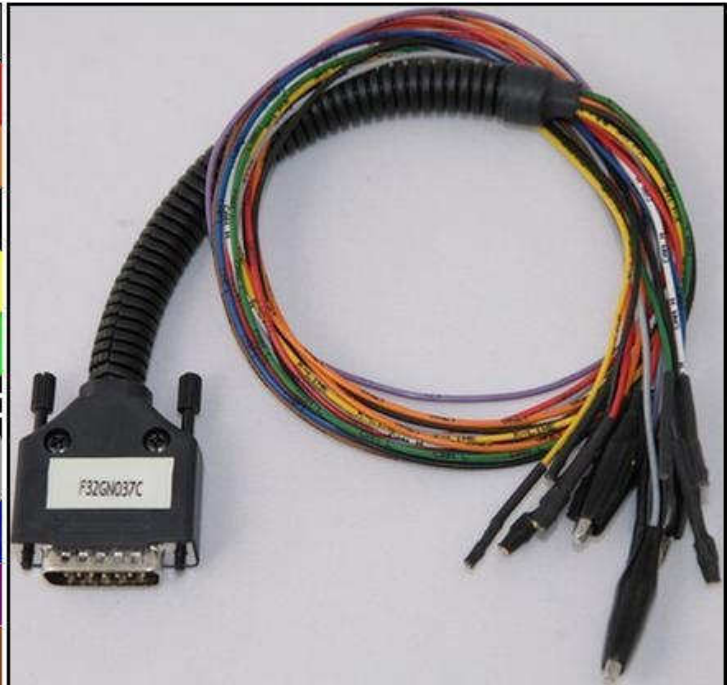


ECU CONNECTOR



ECU READING & WRITING DIRECT CONNECTION:

For the READING and WRITING procedure use the FLAT cable F34NTF51

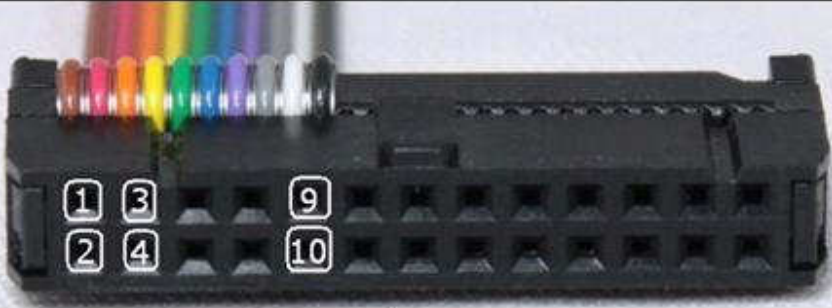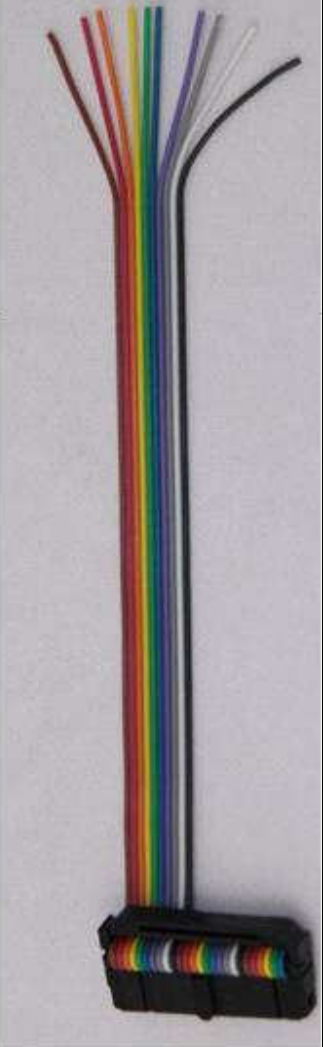		
Pin	Colore Colour	
1	Marrone Brown	
2	Non usato Not used	
3	Non usato Not used	
4	Giallo Yellow	
5	Verde Green	
6	Blu Blue	
7	Viola Violet	
8	Grigio Grey	
9	Bianco White	
10	Nero Black	

For a correct soldering procedure clean very well the soldering lay-by pins from the plastic film.
We suggest you to use a fine grit glass-paper smoothing by gentle pressure the connection of the lay by pins.

