

ECU SIEMENS BMW MS S60/S65




DRIVER: Bdm/Jtag mode → Bdm MPC → MPC55x/56x

MICRO: MPC55x/56x

INFO

(EN) Connect the following pinout with the Tricore Cable.


(IT) Collegare il seguente pinout con il cavo Tricore.

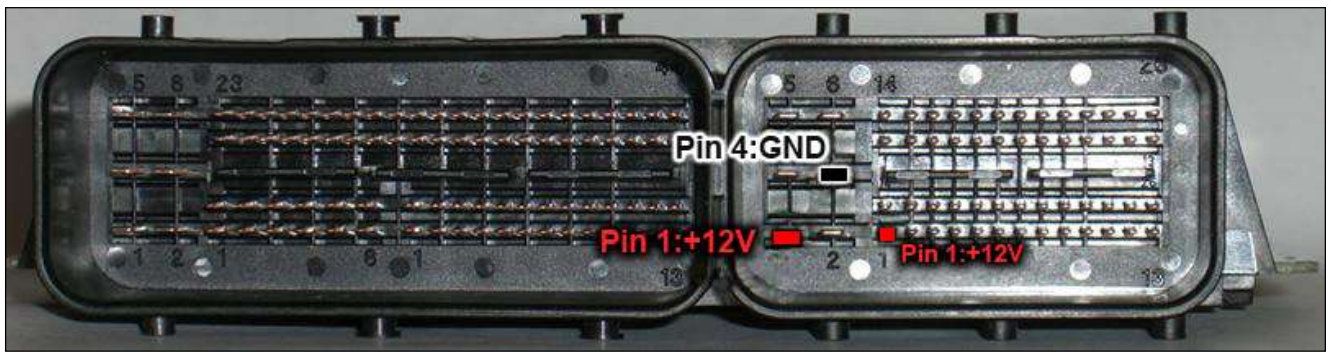

(EN) Material required:

(IT) Materiale necessario:

Siemens Marelli
BDM Adapter tight



Gray flat cable



Pin strip




(EN) It needs to clean the card in the interested zone in a such way that it is deprived of any protective agent and after of that solder the pin strip.

This ECU have 2 microprocessor and 2 BDM door:

(IT) Occorre pulire la scheda nella zona interessata in modo tale che sia priva di qualsiasi agente protettivo e successivamente saldare i pin strip.

Questa centralina presenta due processori e quindi 2 porte BDM:

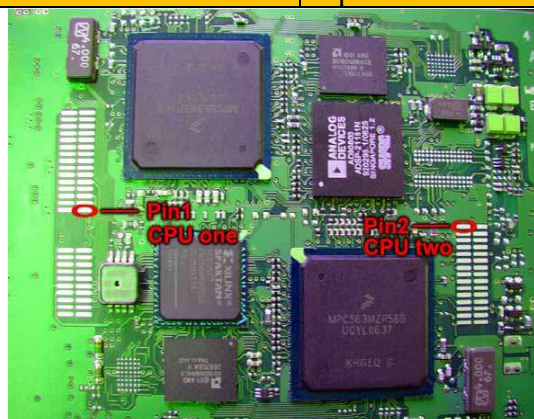


(EN) Now for reading micro 1, insert Siemens adapter in the pin strip with the cable flat like in photo:

(IT) A questo punto per leggere il micro 1 inserire l'adattatore Siemens nei pin strip con il cavo flat come in foto:



(EN) For reading micro 2, insert Siemens adapter in the pin strip with the cable flat like in photo:

(IT) Per leggere il micro 2 inserire l'adattatore Siemens nei pin strip con il cavo flat come in foto:

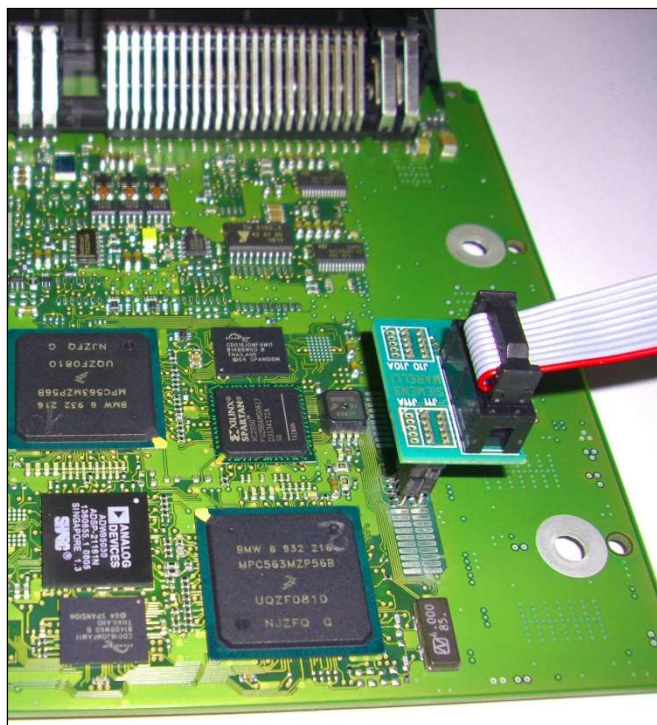

(EN) It will now be possible to read and write the ECU.

(IT) Ora sarà possibile leggere e scrivere la ECU.