

VAG GROUP

Continental SIMOS PCR2.1 (Diesel)





DRIVER: Tool Boot mode → Infineon Tricore
Benchmode Simos Sim → Benchmode Simos PCR2.1
Tricore Sak TC1796
MICRO: TC1796

INFO

(EN) Set the tool as shown in the photo and connect the following pinout with the Tricore Cable.

(IT) Impostare lo strumento come indicato in foto e collegare il seguente pinout con il cavo Tricore.

RED: + 12V | BLACK: GROUND | BLUE: CAN-H | ORANGE : CAN-L | WHITE | BROWN

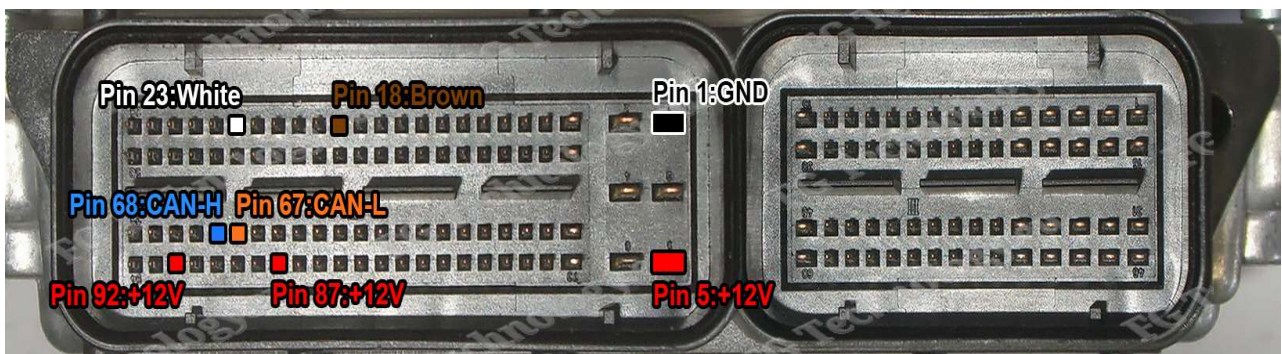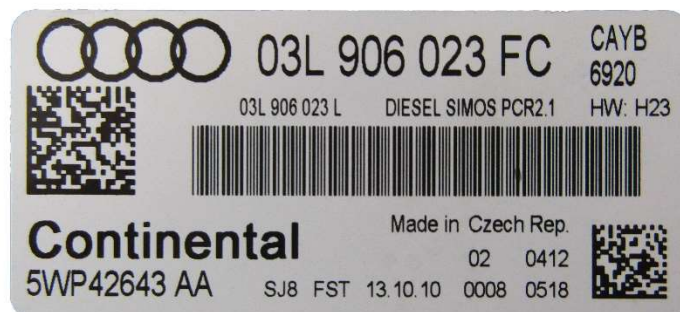

ATTENTION!

(EN) With this driver it is possible to **apply the write patch on the Internal Flash**. When the modified file is loaded, a message will appear indicating: Apply Patch for **UNLOCK?**
By pressing YES, it will be applied and writing will begin.

INFORMATION

When the **ecu data** is done, various information will be shown including:
CHIPID: Ecu ID.
PROCON: Internal Eeprom zones.
OTP (One time programming): These are zones that cannot be rewritten.

ATTENZIONE!

(IT) Con questo driver è possibile applicare la **patch in scrittura sulla Internal Flash**. Quando verrà caricato il file modificato uscirà un messaggio con indicato: Applicare Patch per l'**UNLOCK?**
Premendo SI, essa sarà applicata e inizierà la scrittura.

INFORMAZIONI

Quando si faranno i **dati ecu**, verranno mostrate varie informazioni tra le quali:
CHIPID: Ecu ID.
PROCON: Zone Eeprom interne.
OTP (Una sola programmazione): Sono zone che non possono essere riscritte.