

mitsubishi **BOSCH EDC17CP15 (Diesel)**




DRIVER: Tool Boot → Bench mode → Infineon Tricore Benchmode → Tricore Sak TC1796
MICRO: TC1796

INFO

(EN) Set the tool as shown in the photo and connect the following pinout with the Tricore Cable.

(IT) Impostare lo strumento come indicato in foto e collegare il seguente pinout con il cavo Tricore.

RED: + 12V | **BLACK: GROUND** | **BLUE: CAN-H** | **ORANGE : CAN-L** | **WHITE** | **BROWN**

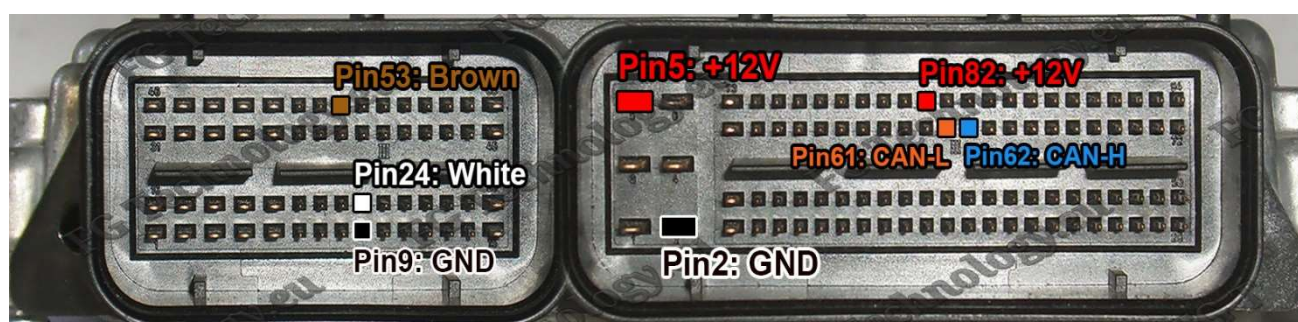

(EN) If using the **BENCH MODE TRICORE SAK TC1796** driver, the external Flash is recognized, use the driver: **BENCHMODE TRICORE SAK TC1796 + Ext. FLASH**

(IT) Se utilizzando il driver **BENCH MODE TRICORE SAK TC1796**, viene riconosciuta la Flash esterna, utilizzare il driver: **BENCHMODE TRICORE TRICORE SAK TC1796 + Ext. FLASH**