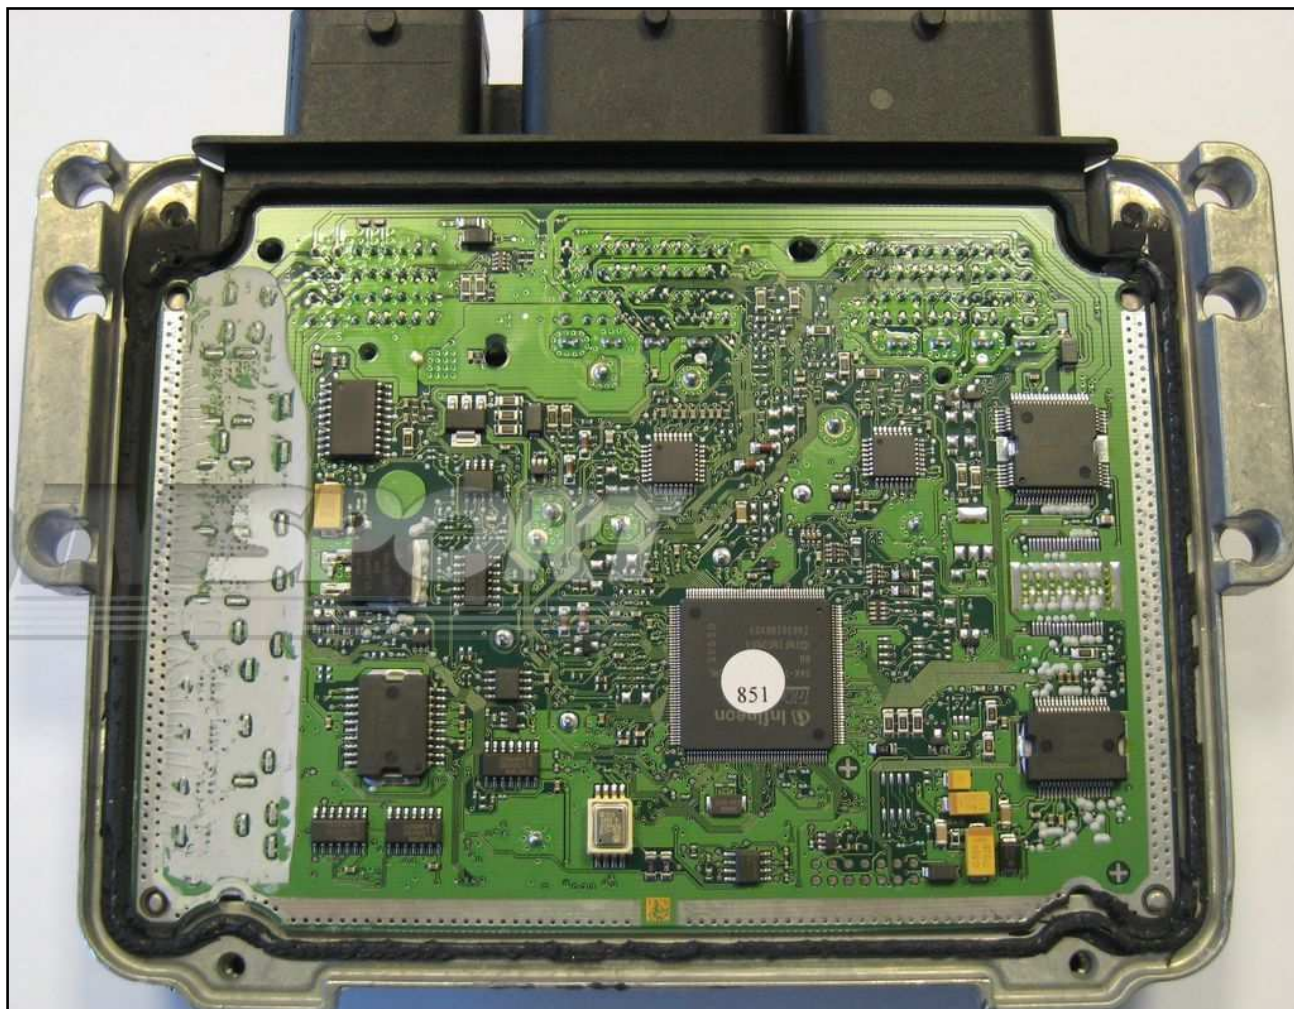


PLUGIN 196 : NEW TRASDATA


DIRECT CONNECTION

In order to connect to the ECU use the CABLE F32GN037C.


Make sure that the POWER led (red) on NEW TRASDATA is ON.

Do not use this connection with the DIMA.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION
ROSSO RED	POSITIVO DIRETTO POWER BATTERY
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON
NERO BLACK	MASSA GND
GIALLO YELLOW	KLINE
VERDE GREEN	CAN LOW
BIANCO WHITE	CAN HIGH
GRIGIO GREY	POL4 BOOT
BLU BLUE	POL5 CNF1
VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE
MARRONE BROWN	RESET

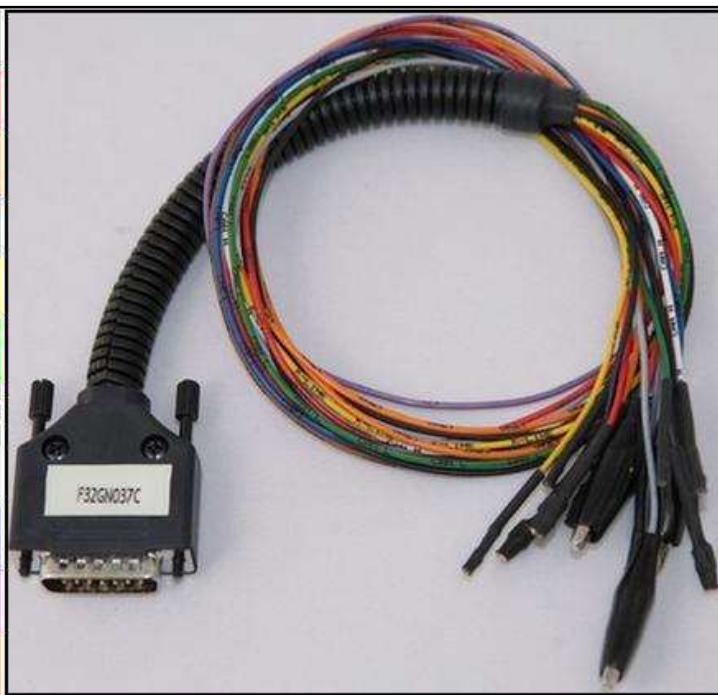



ECU CONNECTOR

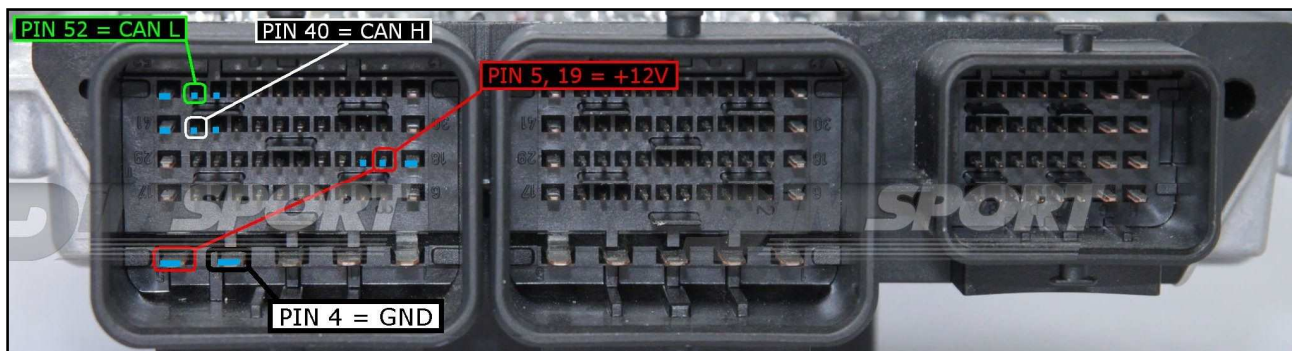

DIRECT CONNECTION POL4

Connect the GREY wire of the cable F32GN037C as described here below :


COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION
GRIGIO GREY	POL4 BOOT

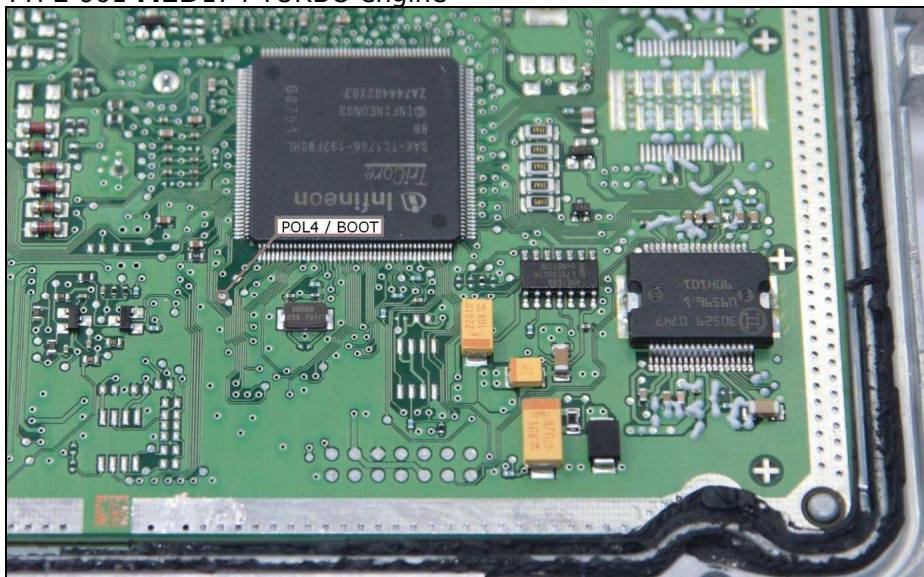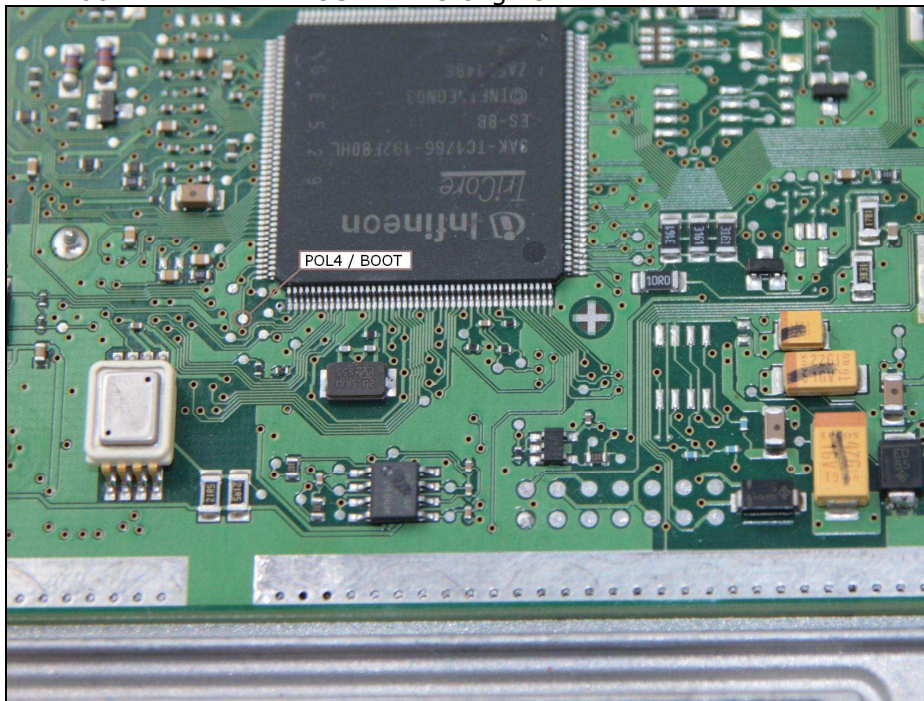TYPE 001 MED174 TURBO engine**TYPE 002 MEV174 ATMOSPHERIC engine**


DIMA CONNECTION

TYPE 001 **MED**174 TURBO engine

Connect the boot pin to the pad n.10 of the soldering lay-by pins then verify that the switch BOOT present on the F34DM011 is set in position ON.

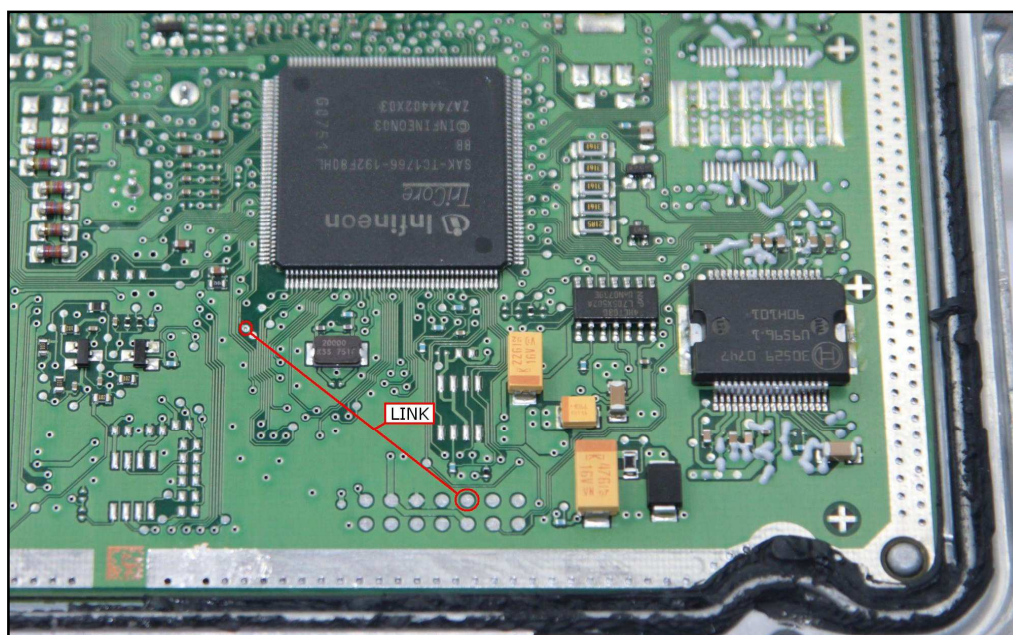


The following picture of the DIMA adapter F34DM011 connection is merely indicative.

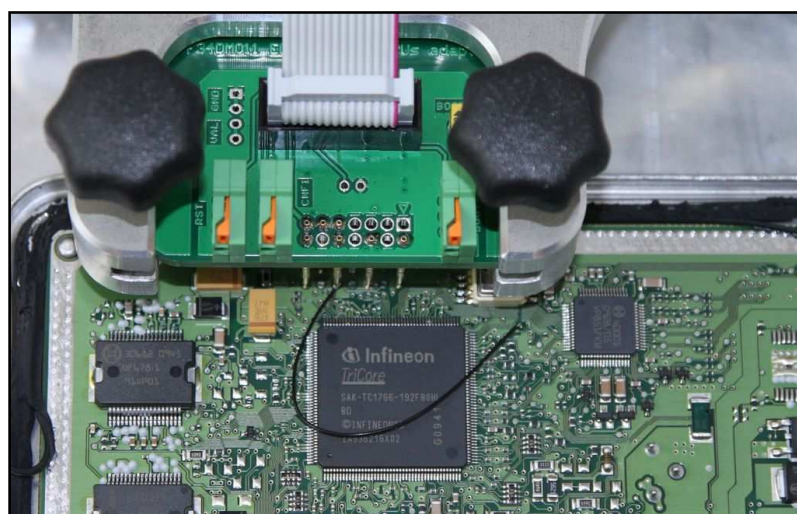

TYPE 002 **MEV**174 ATMOSPHERIC engine

Connect the boot pin to the pad n.10 of the soldering lay-by pins then verify that the switch BOOT present on the F34DM011 is set in position ON.

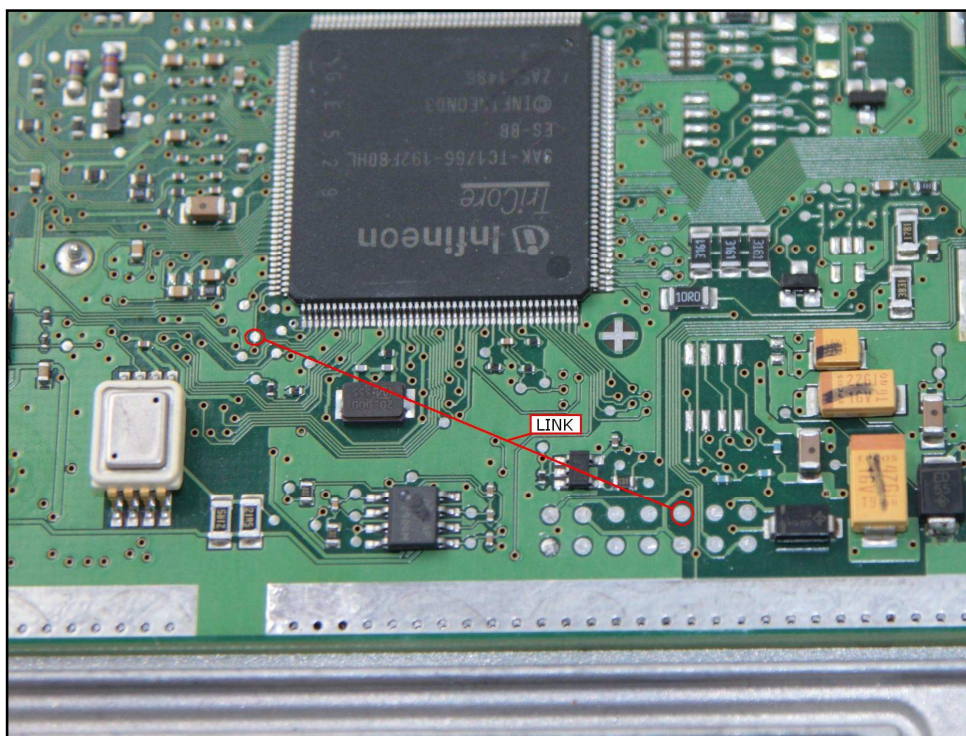

The following picture of the DIMA adapter F34DM011 connection is merely indicative.

