


PLUGIN 042 :NEW TRASDATA

The lay-by pin is placed in the lower part of the ECU.

WARNING

IF the car is a MASERATI equipped with ME7.3.1 ECU for a correct communication it is necessary to move a resistor on the board. Please check pg. 3 of this manual.


IF the car is a FERRARI equipped with ME7.3.2 ECU it is NOT necessary to move any resistor.

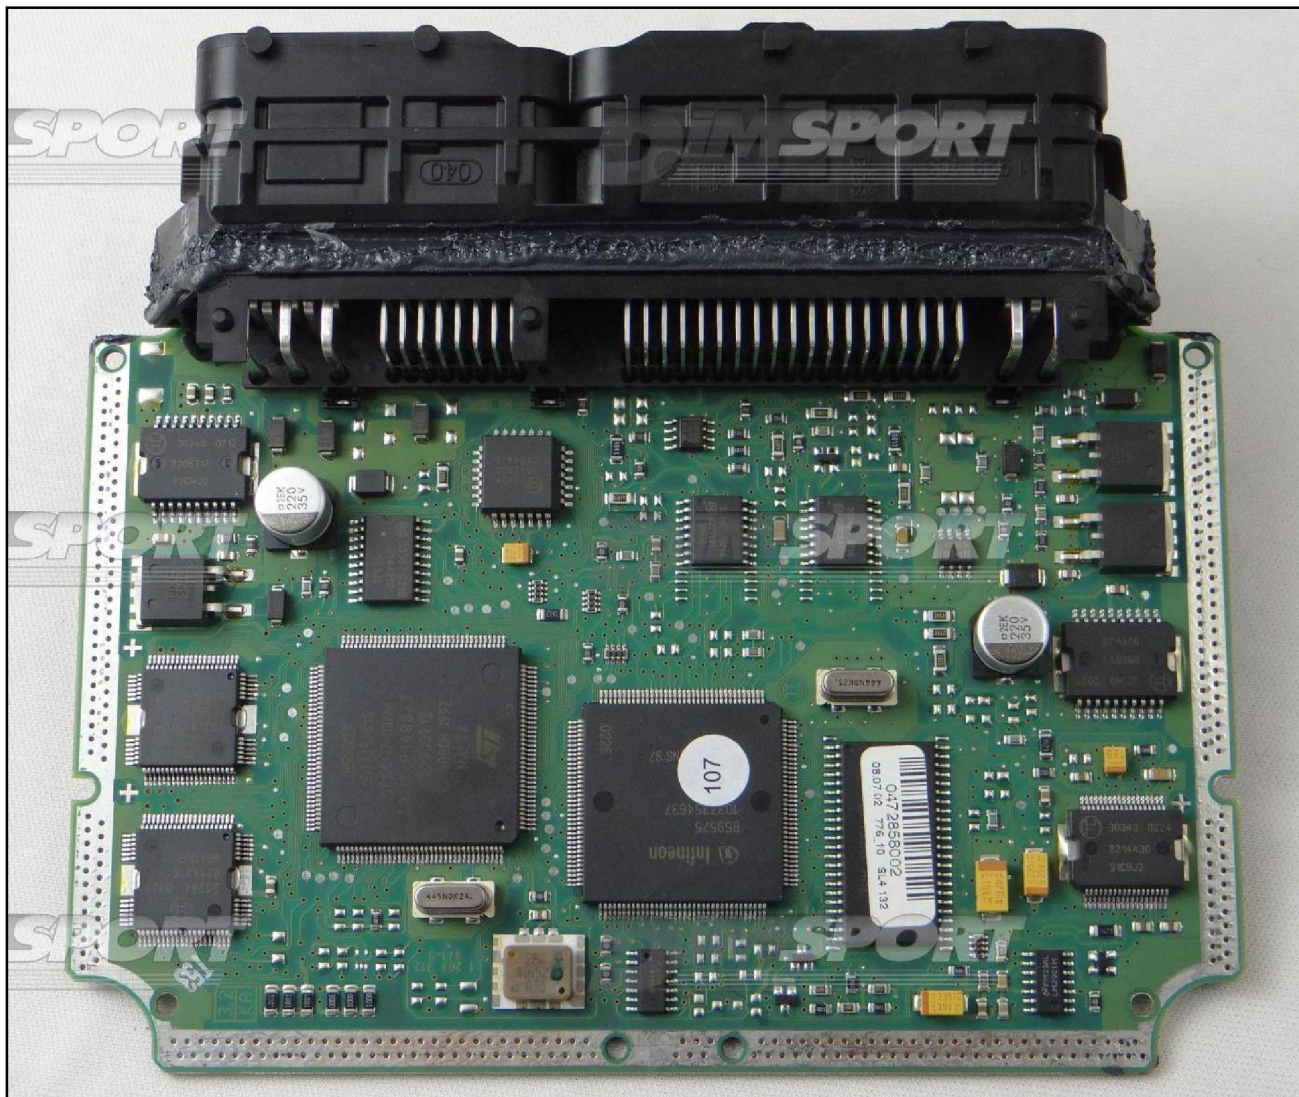

DIRECT CONNECTION


In order to connect to the ECU use the CABLE F32GN037C.

Make sure that the POWER led (red) on NEW TRASDATA is ON

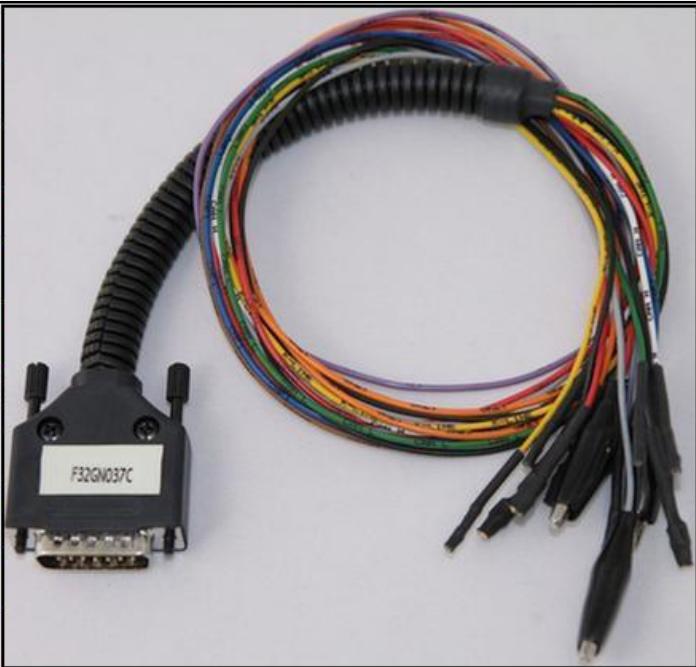
COLORE FILO WIRE COULOR	DESCRIZIONE DESCRIPTION	
ROSSO RED	POSITIVO DIRETTO POWER BATTERY	
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON	
NERO BLACK	MASSA GND	
GIALLO YELLOW	KLINE	
VERDE GREEN	CAN LOW	
BIANCO WHYTE	CAN HIGH	
GRIGIO GREY	POL4 BOOT	
BLU BLUE	POL5 CNF1	
VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE	
MARRONE GREY	RESET	



To the pin 3,21,62 you can connect both wires red and orange, they both have 12 Volt signal.

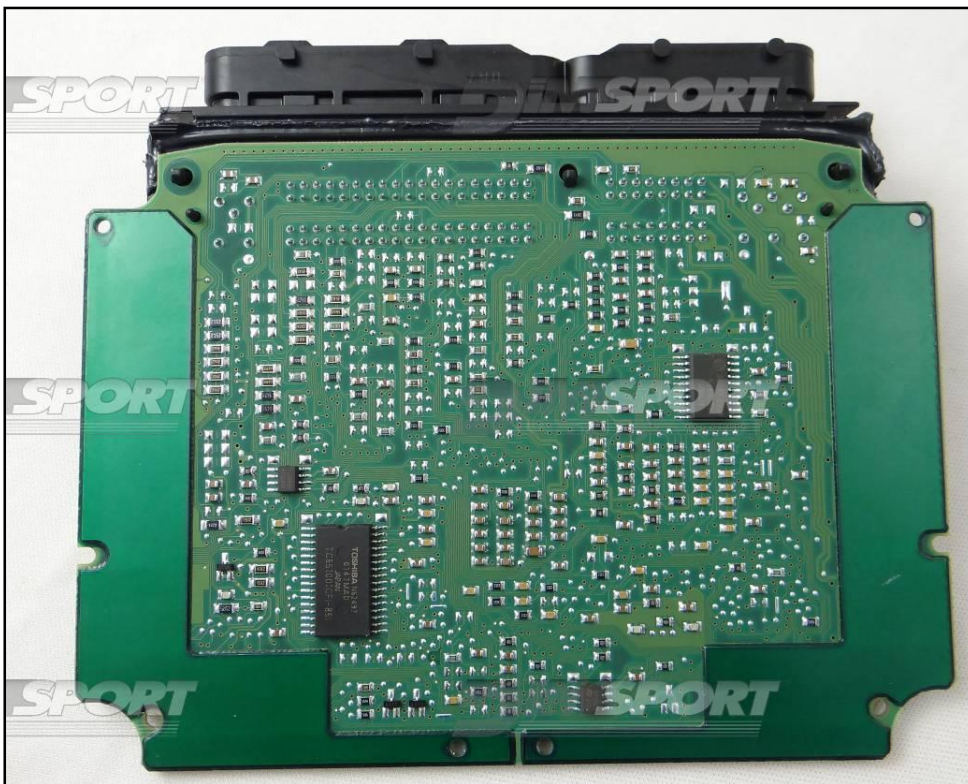0 Ohm RESISTOR DISPLACEMENT ONLY for MASERATI equipped with ME7.3.1 ECU

For a correct communication it is necessary to move the 0 Ohm resistor from position 1 to position 2. Please check the image here below. At the end of the reading/writing operation it is necessary to set the resistor in the original position.

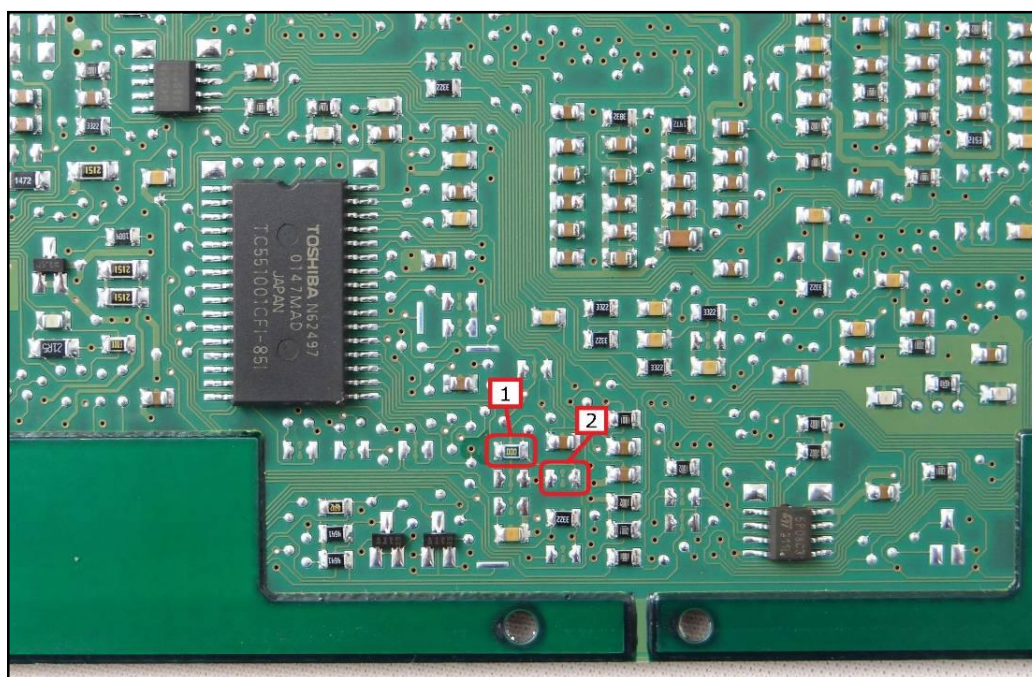

BOOT CONNECTION

Connect the GREY wire of the cable F32GN037C as described here below :

COLORE FILO WIRE COULOR	DESCRIZIONE DESCRIPTION
GRIGIO GREY	POL4 BOOT

