

NEW TRASDATA

PLUGIN 675 BOSCH_EDC17C64_IROM_TC1797_GPT_VAG

PLUGIN 918 BOSCH_EDC17C54_IROM_TC1797_GPT_VAG

GPT CONNECTION

To perform the GPT connection it is necessary to use both the ANALOG PORT and the DIGITAL PORT.

GPT connection with loose wires


Connect the F32GN037 cable to the **ANALOG PORT**

Connect the F34NTF53 cable to the **DIGITAL PORT**, ONLY the wire 23 (ORANGE) and wire 24 (YELLOW) will be used as shown in the following picture


GPT connection with DIMA

Connect the F32GN038 cable to the **ANALOG PORT**

Connect the F34NTF53 cable to the **DIGITAL PORT** ONLY the wire 23 (ORANGE) and wire 24 (YELLOW) will be used as shown in the following picture

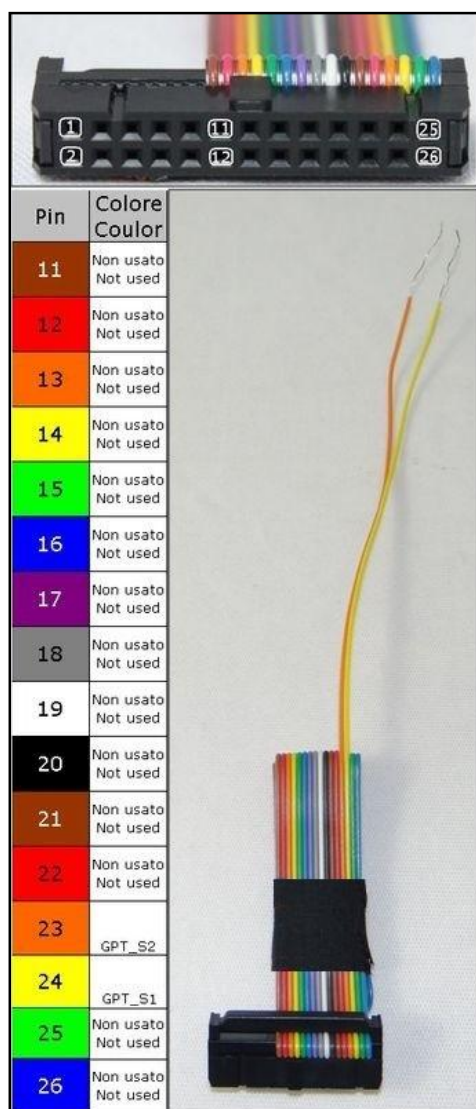

EDC17C64 VAG / EDC17C54 VAG

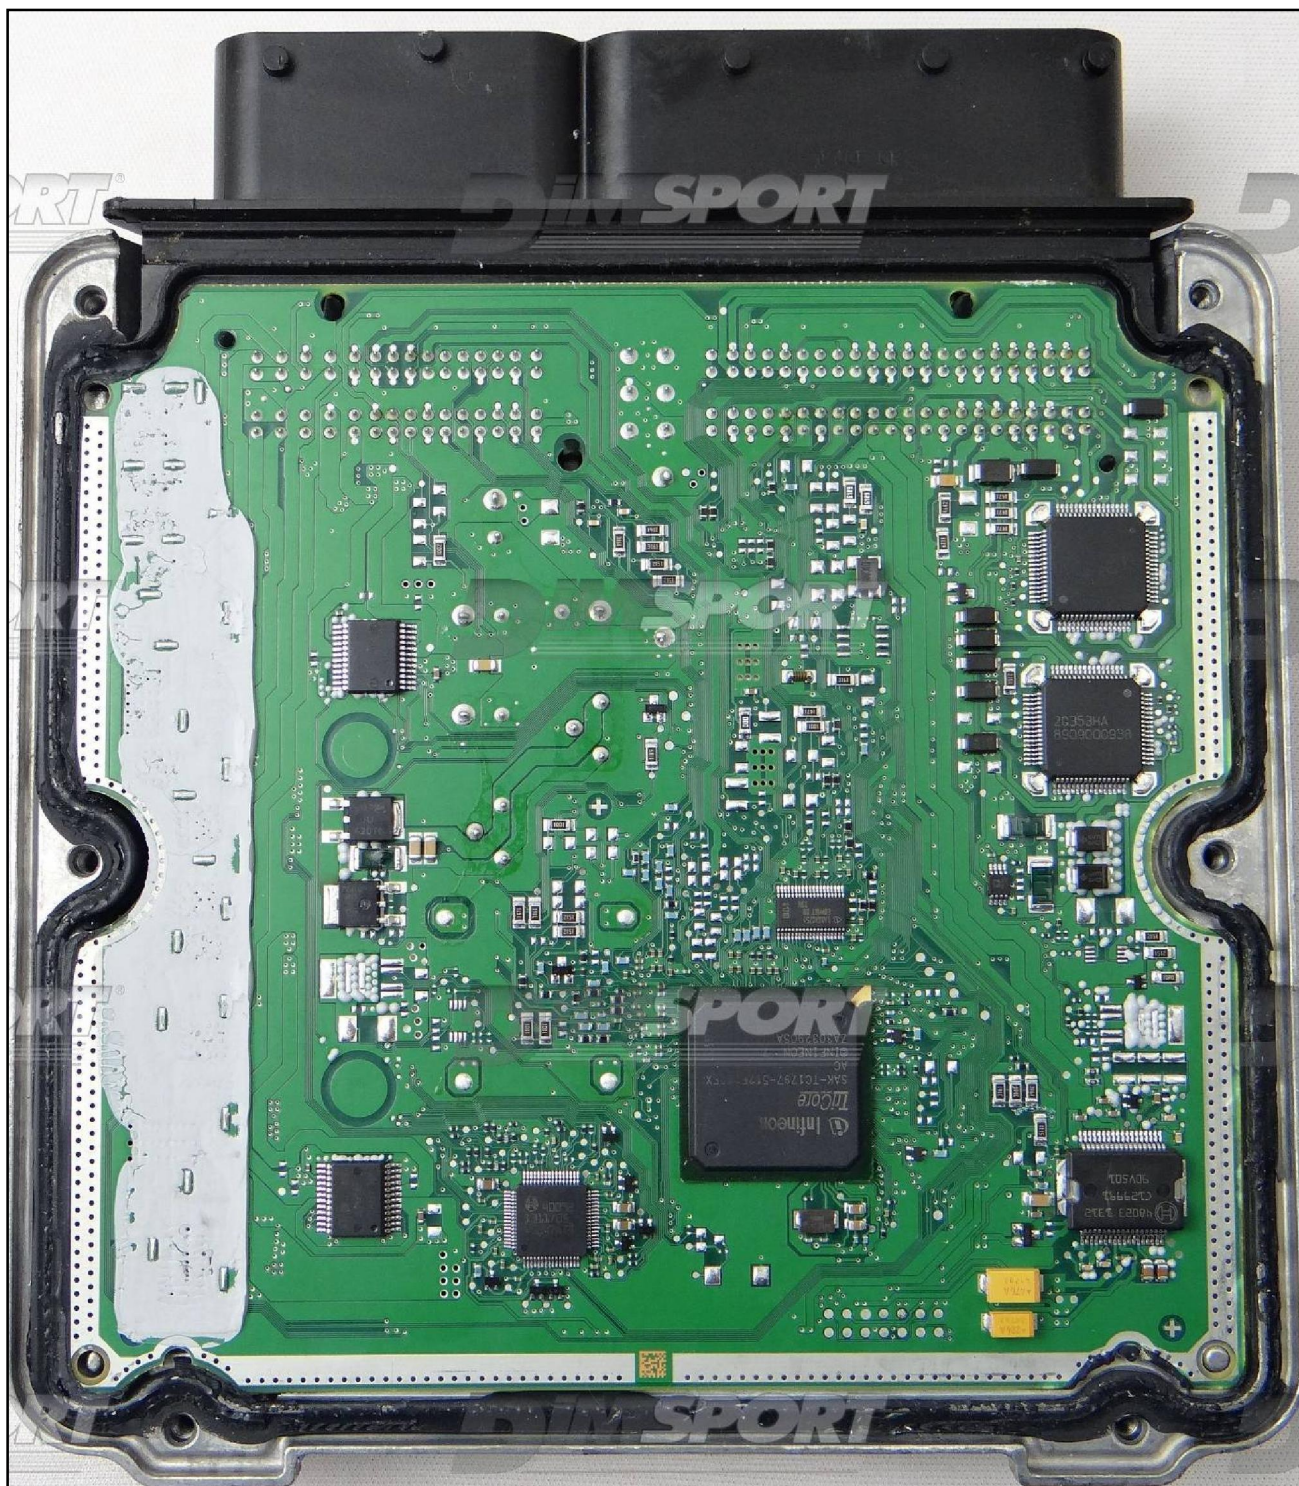


ECU CONNECTOR

For the connection with LOOSE WIRES use the cable F32GN037C connected to the ECU.


Do NOT use this connection for the DIMA.

Make sure that the POWER led (red) on NEW TRASDATA is ON.

COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION
ROSSO RED	POSITIVO DIRETTO POWER BATTERY
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON
NERO BLACK	MASSA GND
GIALLO YELLOW	KLINE
VERDE GREEN	CAN LOW
BIANCO WHITE	CAN HIGH
GRIGIO GREY	POL4 BOOT
BLU BLUE	POL5 CNF1
VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE
MARRONE BROWN	RESET

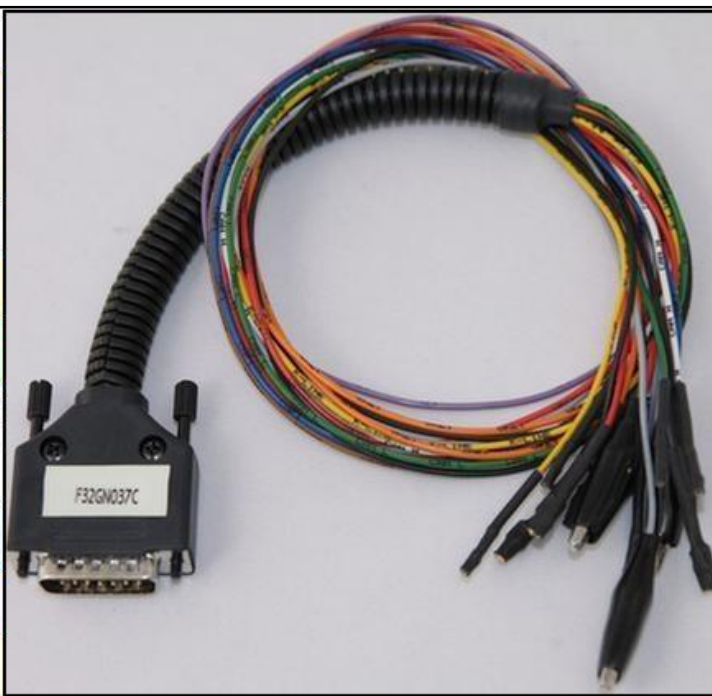


LOOSE WIRES CONNECTION

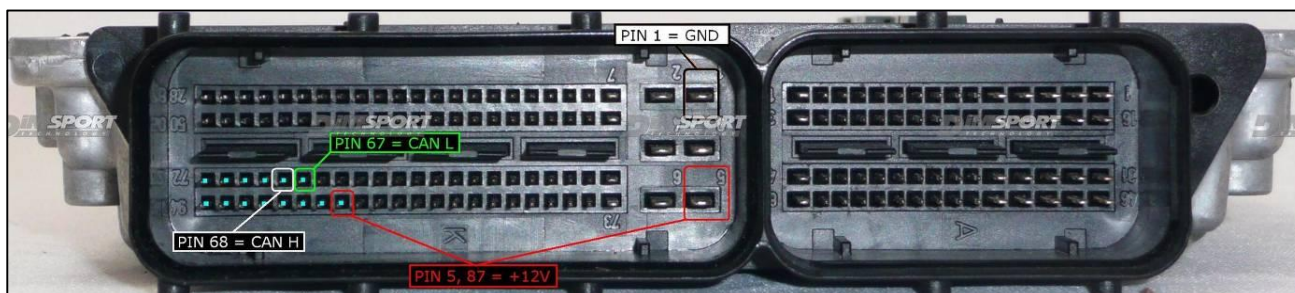

BOOT CONNECTION

Connect the GREY wire of the cable F32GN037C as shown in the picture.


COLORE FILO WIRE COLOUR		DESCRIZIONE DESCRIPTION
	GRIGIO GREY	POL4 BOOT

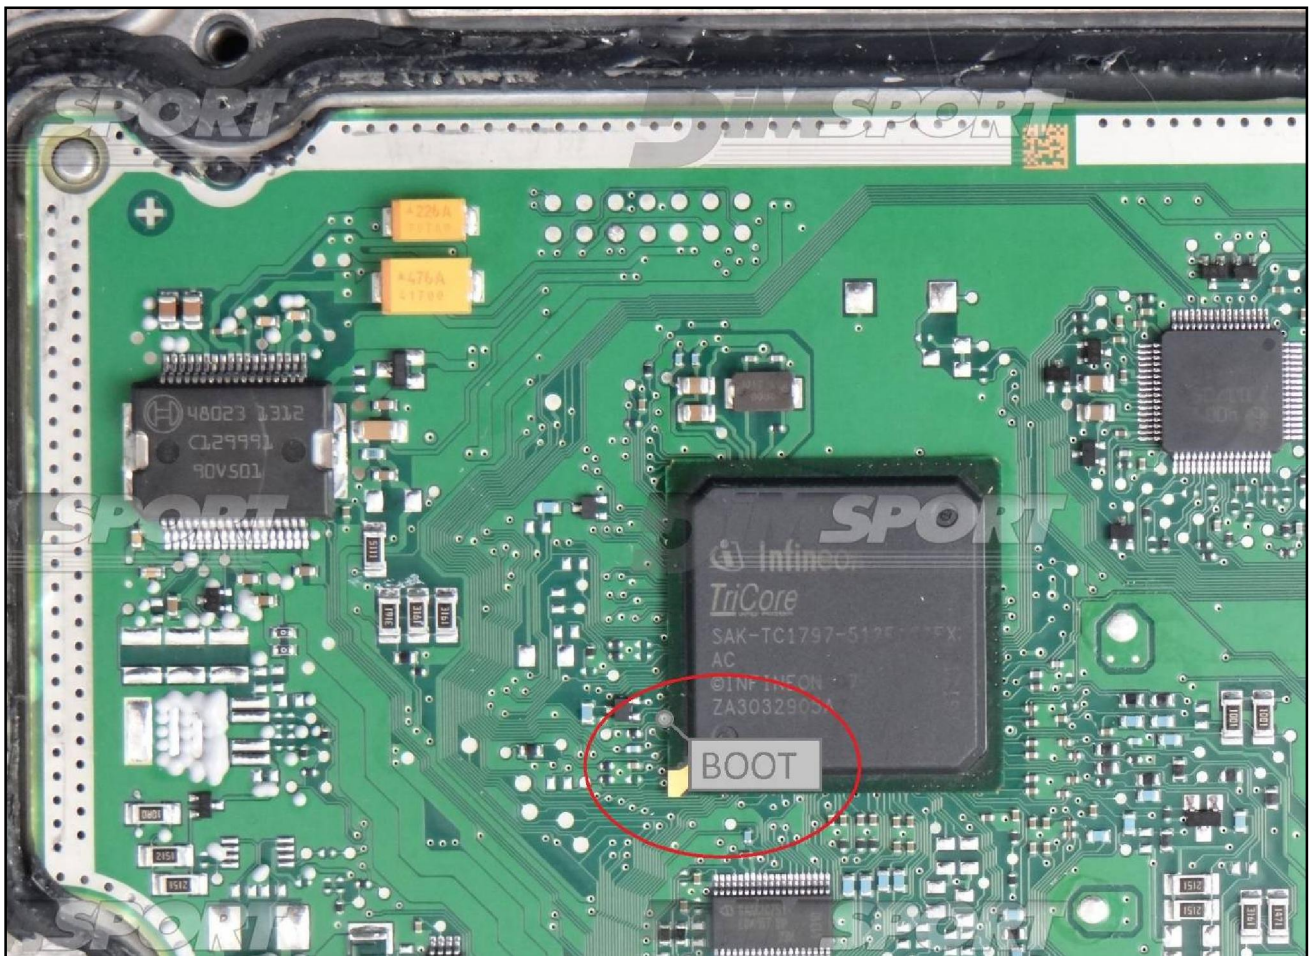

GPT CONNECTION

Connect the GPT_S1 & GPT_S2 pins to the specific wires of the F34NTF53 flat cable as shown in the following picture

PIN / Colore PIN / Coulor	DESCRIZIONE DESCRIPTION
23	GPT_S2
24	GPT_S1

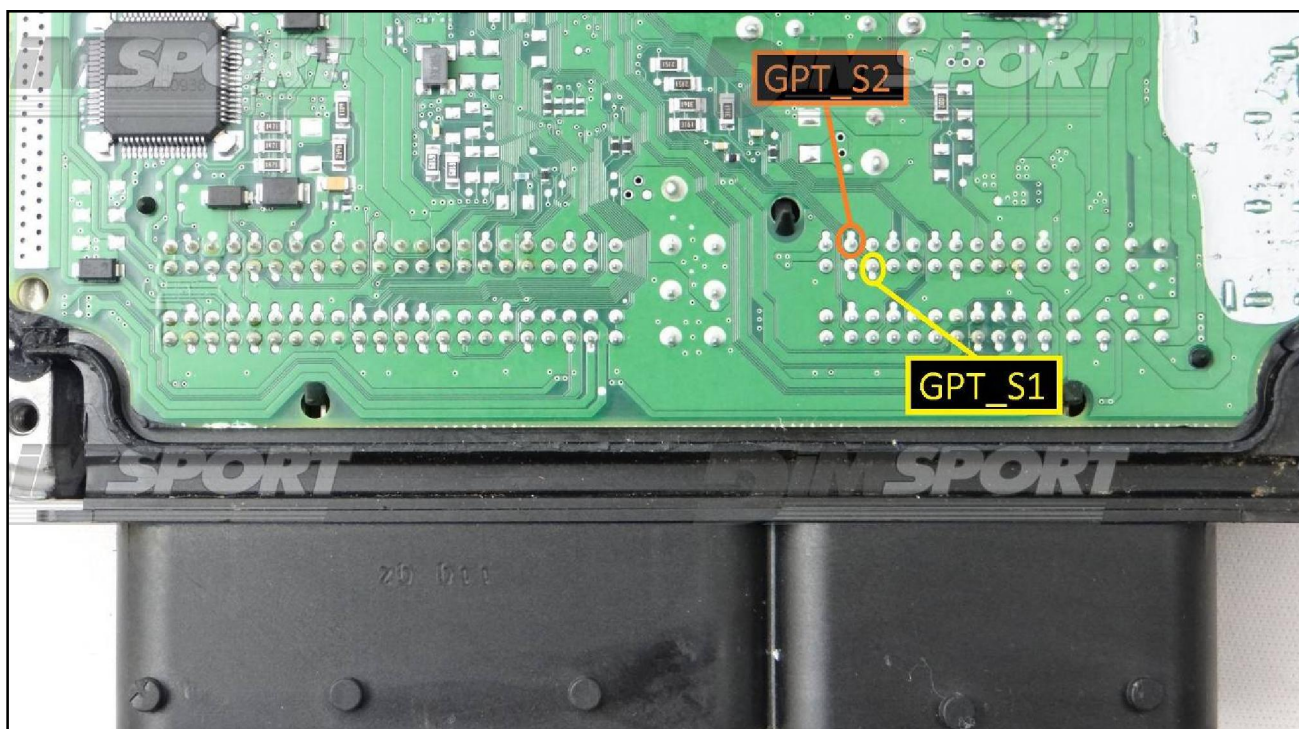

DIMA & DIMA BNP CONNECTION

For the DIMA connection is required the F34DM011 DIMA adapter + the F32GN038 flat cable. Connect the F34NTF53 flat cable to the DIGITAL PORT, connect the F32GN038 FLAT cable to the ANALOG PORT and to the F34DM011 DIMA adapter. Then perform the BOOT connection using the BOOT clamp on the DIMA adapter, verify that the switch BOOT present on the F34DM011 is set in position ON. Perform GPT connections as shown in the previous detail at pg.5 and as in the following picture.

