

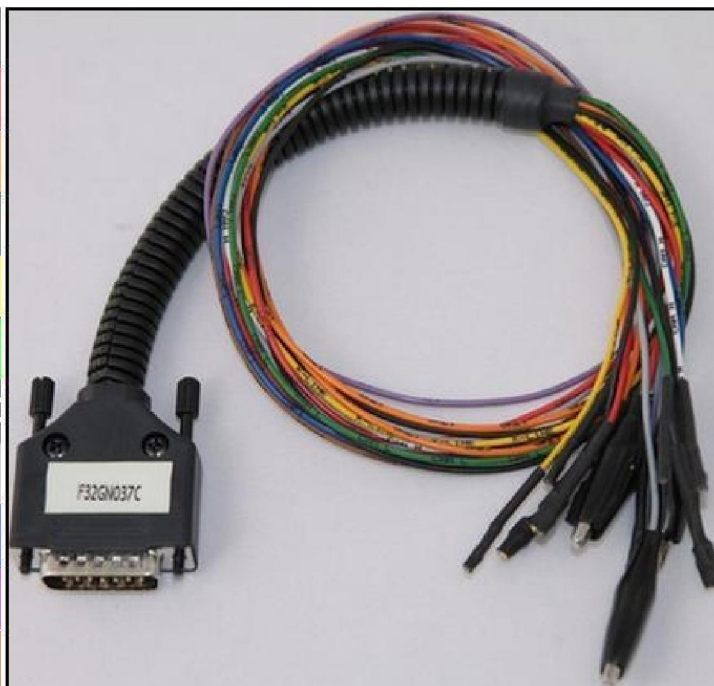
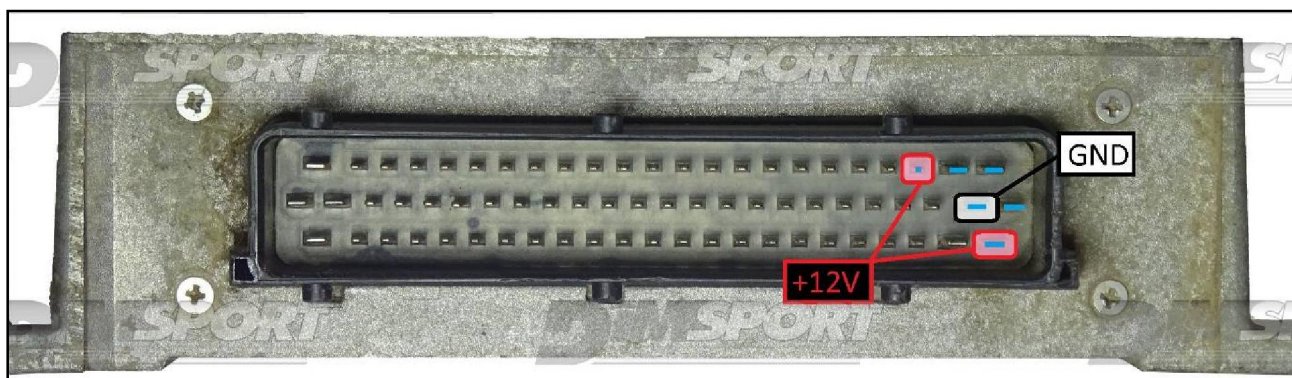
PLUGIN 825 :NEW TRASDATA

DIRECT CONNECTION

In order to connect to the ECU use the cable F32GN037C.

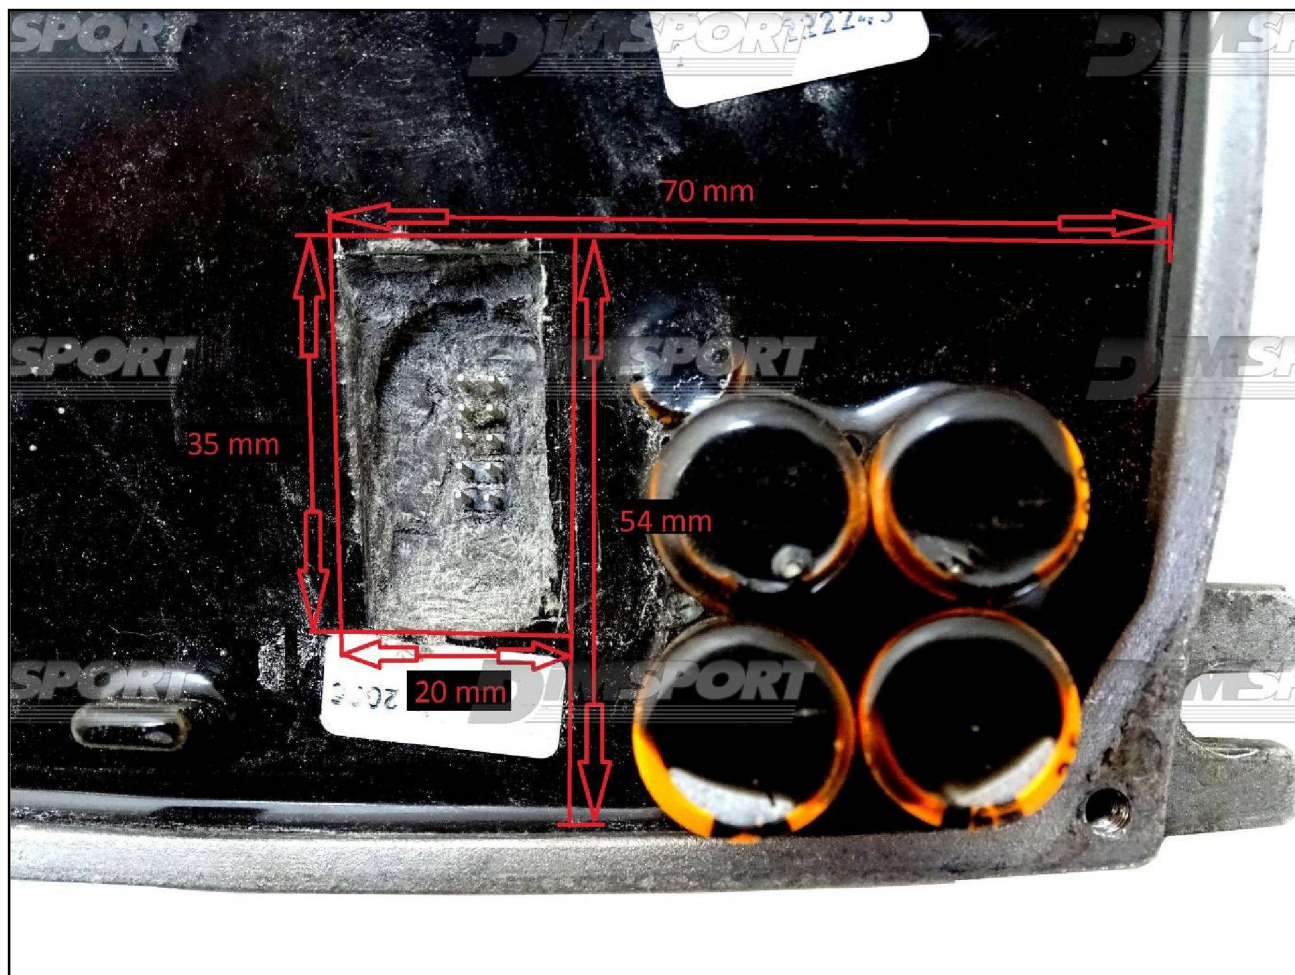
Make sure that the POWER led (red) on NEW TRASDATA is ON.

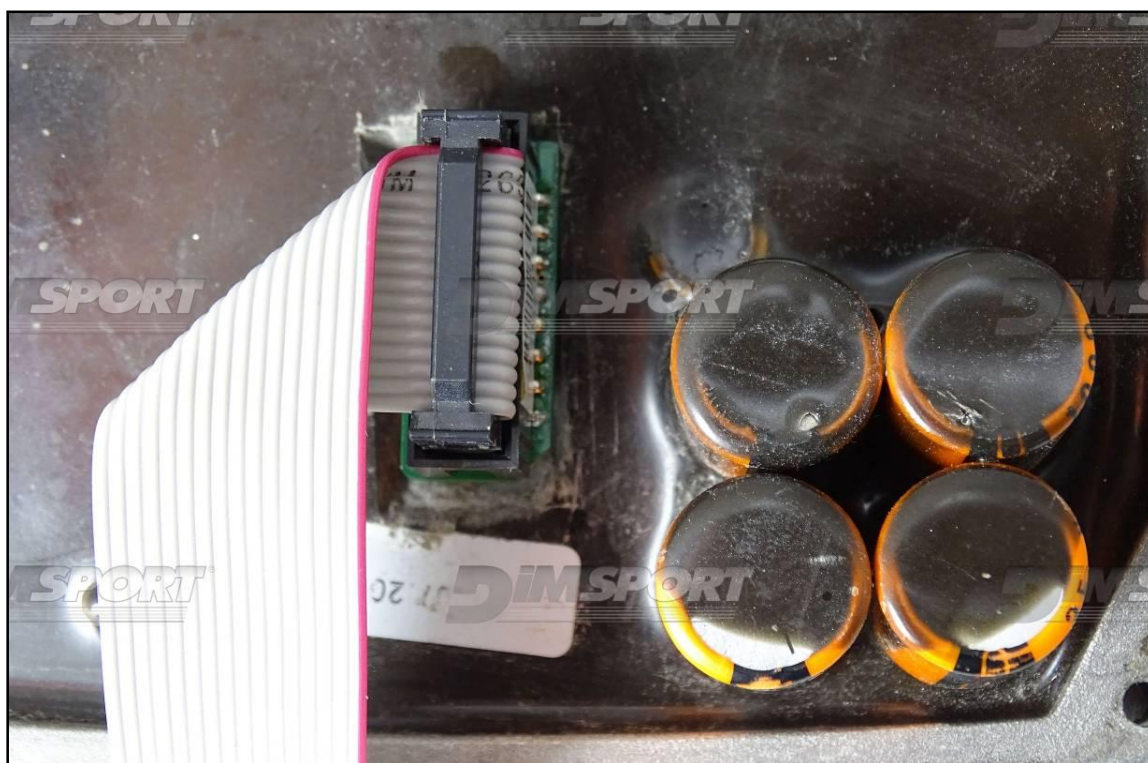
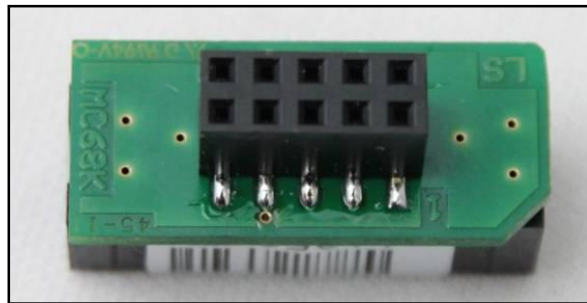
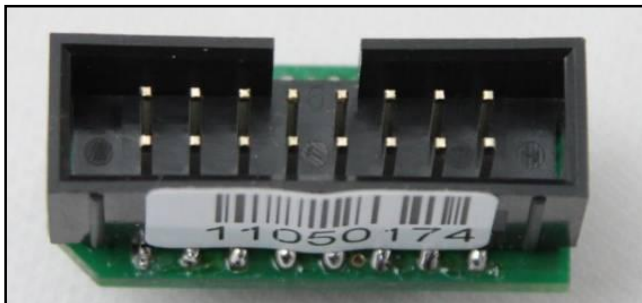
COLORE FILO WIRE COLOUR	DESCRIZIONE DESCRIPTION
ROSSO RED	POSITIVO DIRETTO POWER BATTERY
ARANCIO ORANGE	POSITIVO SOTTO QUADRO POWER SWITCH ON
NERO BLACK	MASSA GND
GIALLO YELLOW	KLINE
VERDE GREEN	CAN LOW
BIANCO WHITE	CAN HIGH
GRIGIO GREY	POL4 BOOT
BLU BLUE	POL5 CNF1
VIOLA/GRIGIO PURPLE/GREY	TENSIONE PROG. PROG. VOLTAGE
MARRONE BROWN	RESET

**ECU CONNECTOR**

To get access to the communication pads for the reading procedure you must remove part of the silicon that covers the ECU board.

After properly removing the silicon and before connecting the wirings please check that the vehicle starts fine and that there are no fault codes or warning lights on the dashboard.



F34NTA11 ADAPTER CONNECTION

LOOSE WIRES CONNECTION:

Connect the F34NTF53 cable as shown in the following picture:

			
Pin	Colore Coulor		
11	Non usato Not used		
12	Non usato Not used		
13	Non usato Not used		
14	Non usato Not used		
15	Non usato Not used		
16	Blu Blue		
17	Viola Violet		
18	Non usato Not used		
19	Bianco White		
20	Nero Black		
21	Marrone Brown		
22	Rosso Red		
23	Non usato Not used		
24	Non usato Not used		
25	Non usato Not used		
26	Non usato Not used		

